



ROOM HUMIDISTAT

ROOM HUMIDISTAT

Overview

- 1 Step
- High reliability and accuracy
- Protection class IP30
- Setpoint settings can be locked
- Changeover contact 250V AC, 5A



Overview

149-DCV-H1 is an electro-mechanical room humidistat for controlling humidification and/or dehumidification in HVAC systems.

Function

The humidistat uses a synthetic element as sensor medium. The synthetic element stretches as the humidity increases and shrinks as the humidity decreases. These changes are transmitted to a microswitch. The setpoint knob affects the position of the microswitch in relation to the synthetic element. The setpoint can be set at between 35...95% RH.

Synthetic Element

We have developed a new synthetic element that gives a high accuracy at a low cost. In order to eliminate the risk of tampering, the setpoint knob can be locked. In order to eliminate the risk of tampering, the setpoint knob can be locked by means of a locking screw under the cover.

Typical applications


Can be used to control a humidifier or a dehumidifier or for on/off controlling of a fan. Can also be used to alarm when the humidity exceeds or falls below a pre-set level.

Technical Data

Product Code	Material Casing	Ambient Temperature °C	Mounting	Protection Class	Outputs Changeover Contact	Setpoint %	Hysteresis %
149-DCV-H1	Polycarbonate	0 - 40°C	Wall	IP30	250V AC, 5A	35 - 95 RH	+/- 4 RH

ROOM HUMIDISTAT

Dimensional Data & Wiring

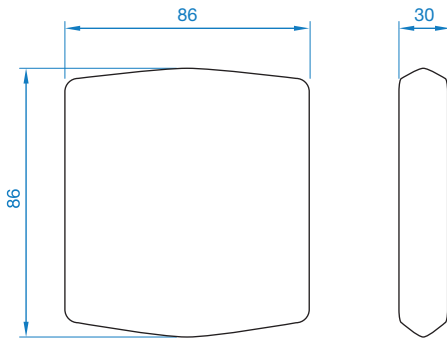

Wiring

Humidification Closing contact between terminals 1 and 2

Dehumidification Closing contact between terminals 1 and 3

Dimensions are in mm.

This Product conforms with the requirements of European LVD standards EN 60730-1:2000+A11+A12, EN 60730-2-13:1998+A1 and carries the CE-mark

Etta Fans Limited has a policy of continuous product development and improvement and therefore reserves the right to supply products which may differ from those illustrated and described in this publication. Confirmation of dimensions and data will be supplied on request.

Building Services

Tel **+44 (0) 1384 275800**
Fax **+44 (0) 1384 275810**
Email **info@eltafans.co.uk**

46 Third Avenue, Pensnett Trading Estate, Kingswinford,
West Midlands, DY6 7US United Kingdom

Applied Technology & Building Services Export

Tel **+44 (0) 1489 566500**
Fax **+44 (0) 1489 566555**
Email **at@eltafans.co.uk / export@eltafans.co.uk**

17 Barnes Wallis Road, Segensworth East Industrial Estate,
Fareham, Hampshire, PO15 5ST United Kingdom

eltafans.com

149-DCV-H1-03-2018 Issue A



BS EN ISO 9001:2015 FM 556465

