



QUIETFLOW SQSDCV

Centrifugal Box Fan

QUIETFLOW SQSDCV

Product Overview

- 8 sizes from 100mm to 500mm
- Air volume flow rates up to 1.789 m³/s
- Static pressures up to 1061 Pa
- Suitable for operating temperatures up to +60°C
- Robust galvanised sheet steel casing
- Available in **EC**

Acoustically lined single inline centrifugal fans with demand control. Designed to monitor and control one or more fan units simultaneously, with 6 pre-programmed fan applications. Supplied Multi-function remote control panel with LCD display.

Low Noise

Each unit is acoustically lined internally with Class O rated (BS 476 Parts 6 and 7) fire resistant acoustic foam lining minimising breakout noise levels.

Easy Installation

New multi-mount brackets allow easy mounting in a range of orientations.

Easy Commissioning

Minimum and maximum ventilation rates as well as control settings can all be setup easily via the wall display provided. Settings can be loaded from one display copying settings between units quickly.

Efficient Performance

High efficiency low tonal noise backward curved centrifugal impellers are directly driven by an EC external rotor motor, provide low specific fan powers and stepless speed control without tonal noise generation.

Weather Resistance

Units can be weatherproofed in the factory to allow external installation.

Controllability

Advanced control features from the Demand Control Ventilation provide an effective, efficient control to meet variable occupancy. This optimises the indoor air quality and energy use of the ventilation

system. Available control: Humidity, temperature, presence, CO₂ and constant pressure.

Warranty

Each SQSDCV has a 12 month warranty.

Construction

Constructed with a robust 1.2mm galvanised mild steel sheet casing. Each casing provides spigots to suit standard circular ducting. A removable lid is provided as standard to allow easy maintenance and cleaning.

Motor

Units have an EC external rotor motor fitted as standard. The motor contains sealed for life bearings. Thermal Class of motors to THCL 130 or 155 dependent on size. All motors are suitable for use in ambient air conditions up to +60°C.

Impeller

High efficiency low tonal noise backward curved centrifugal impeller. Dynamically balanced to ISO 14694 Grade G6.3 and directly driven by the motor to provide a smooth airflow through the unit.

Typical Applications

- Toilets
- Bathrooms
- Hotels
- Schools
- Colleges
- Libraries
- Kitchens
- Factories
- Industrial Units
- Warehousing



Contents

Page	Information
3	Performance Range Curves
4	Performance, SFP & Electrical Data
8	Sound Data
11	Dimensional Data
12	EcoDesign 1253/2014
13	Accessories


Product Coding

Code	Reference
SQSDCV	Product Range
125	Diameter (125/150/200...)
-	
1	Voltage Supply (Single Phase / Three Phase)
AC	Motor Type (AC/EC)
A - Z	Additional Coding (A - Z) Product Variants
e.g.	SQSDCV125 / 1ACL

QUIETFLOW SQSDCV



Performance Range Curves

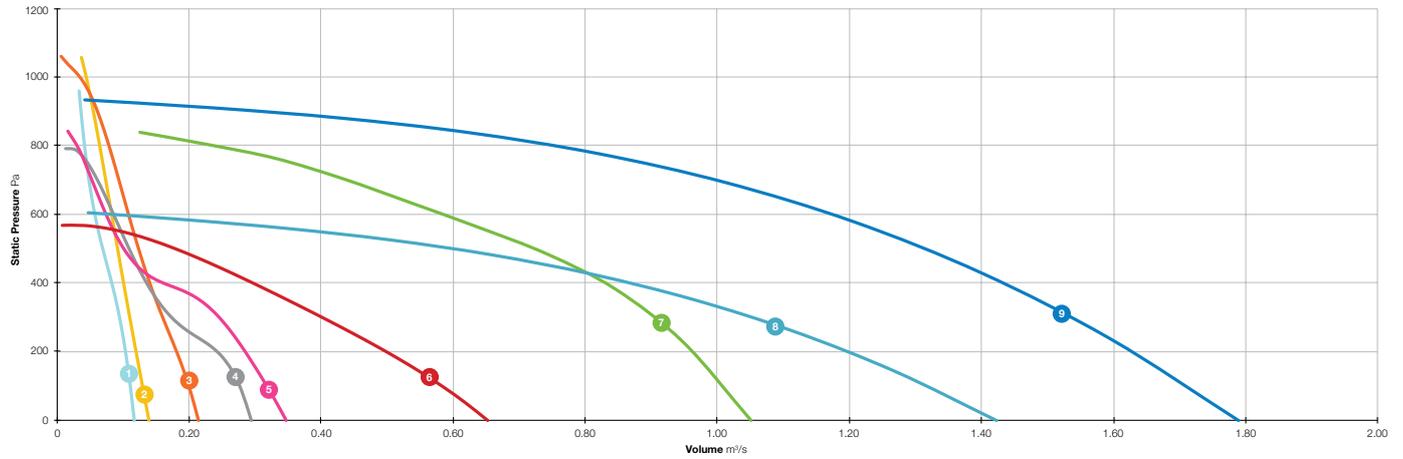

- 1 SQSDCV100 / 1ECL
- 2 SQSDCV125 / 1ECL
- 3 SQSDCV150 / 1ECL

- 4 SQSDCV200 / 1ECL
- 5 SQSDCV250 / 1ECL
- 6 SQSDCV315 / 1ECL

- 7 SQSDCV400 / 1ECL
- 8 SQSDCV500 / 1ECL
- 9 SQSDCV500 / 3ECL

QUIETFLOW SQSDCV



Performance, SFP & Electrical Data

Single Phase 220V to 277V / 50Hz or 60Hz

Product Code	Control Voltage V	Speed r/min	Airflow SFP	Airflow m ³ /s @ Static Pressure Pa												At Best Efficiency Point		Motor Electrical Data		dBA @ 3m	
				0	25	50	75	100	150	200	250	300	350	400	500	Overall Eff %	Input kW	Peak Amps			
SQSDCV100-1ECL	10	4635	m ³ /s	0.116	0.115	0.113	0.112	0.110	0.107	0.103	0.099	0.094	0.089	0.082	0.069	23.7	0.167	1.51	Inlet	51	
			W/(L/s)	1.42	1.43	1.45	1.47	1.50	1.54	1.60	1.67	1.76	1.87	2.01	2.41				Outlet	50	
	8	4185	m ³ /s	0.109	0.107	0.106	0.104	0.102	0.098	0.093	0.088	0.081	0.073	0.065	0.047	26.0	0.113	1.30	Inlet	48	
			W/(L/s)	1.30	1.31	1.33	1.34	1.36	1.39	1.43	1.48	1.55	1.66	1.80	2.26				Outlet	50	
	5	2485	m ³ /s	0.070	0.066	0.062	0.058	0.053	0.039	0.020	-	-	-	-	-	24.0	0.029	0.33	Inlet	44	
			W/(L/s)	0.49	0.51	0.53	0.55	0.59	0.75	1.21	-	-	-	-	-				Outlet	42	
	2	800	m ³ /s	0.020	-	-	-	-	-	-	-	-	-	-	-	7.9	0.003	0.05	Inlet	-	
			W/(L/s)	0.07	-	-	-	-	-	-	-	-	-	-	-				Outlet	-	
			m ³ /s	0.020	-	-	-	-	-	-	-	-	-	-	7.9	0.003	0.05	Breakout	-		
			W/(L/s)	0.07	-	-	-	-	-	-	-	-	-	-				-			
SQSDCV125-1ECL	10	3715	m ³ /s	0.140	0.138	0.135	0.133	0.130	0.125	0.120	0.115	0.111	0.106	0.101	0.092	34.9	0.171	1.26	Inlet	49	
			W/(L/s)	1.19	1.22	1.24	1.27	1.29	1.35	1.40	1.46	1.53	1.60	1.67	1.84				Outlet	54	
	8	3810	m ³ /s	0.135	0.132	0.130	0.128	0.125	0.120	0.115	0.110	0.104	0.098	0.092	0.078	34.9	0.126	1.10	Inlet	49	
			W/(L/s)	1.14	1.15	1.17	1.19	1.21	1.25	1.30	1.34	1.39	1.45	1.51	1.69				Outlet	48	
	5	2260	m ³ /s	0.080	0.076	0.072	0.068	0.064	0.053	0.038	-	-	-	-	-	32.1	0.030	0.24	Inlet	49	
			W/(L/s)	0.44	0.45	0.47	0.49	0.52	0.59	0.75	-	-	-	-	-				Outlet	41	
	2	705	m ³ /s	0.025	-	-	-	-	-	-	-	-	-	-	-	10.4	0.003	0.03	Inlet	-	
			W/(L/s)	0.11	-	-	-	-	-	-	-	-	-	-	-				Outlet	-	
			m ³ /s	0.025	-	-	-	-	-	-	-	-	-	-	10.4	0.003	0.03	Breakout	-		
			W/(L/s)	0.11	-	-	-	-	-	-	-	-	-	-				-			
SQSDCV150-1ECL	10	4105	m ³ /s	0.215	0.212	0.208	0.204	0.200	0.192	0.182	0.171	0.161	0.150	0.141	0.124	43.3	0.174	1.26	Inlet	49	
			W/(L/s)	0.79	0.81	0.82	0.84	0.86	0.90	0.94	1.00	1.06	1.13	1.21	1.39				Outlet	51	
	8	3835	m ³ /s	0.206	0.202	0.198	0.194	0.190	0.182	0.173	0.164	0.155	0.145	0.135	0.112	43.1	0.147	1.14	Inlet	45	
			W/(L/s)	0.70	0.72	0.74	0.76	0.79	0.83	0.89	0.94	1.00	1.07	1.15	1.33				Outlet	51	
	5	2285	m ³ /s	0.119	0.114	0.109	0.103	0.097	0.082	0.062	-	-	-	-	-	45.0	0.034	0.26	Inlet	44	
			W/(L/s)	0.30	0.30	0.32	0.34	0.36	0.43	0.53	-	-	-	-	-				Outlet	47	
	2	715	m ³ /s	0.037	-	-	-	-	-	-	-	-	-	-	-	13.2	0.003	0.03	Inlet	-	
			W/(L/s)	0.09	-	-	-	-	-	-	-	-	-	-	-				Outlet	-	
			m ³ /s	0.037	-	-	-	-	-	-	-	-	-	-	13.2	0.003	0.03	Breakout	-		
			W/(L/s)	0.09	-	-	-	-	-	-	-	-	-	-				-			

Data provided is at standard air density of 1.2 kg/m³.

Data in accordance with ErP 1253/2014 of the European Parliament. Product category is NRVU. Measurement category used to determine energy efficiency: D.

A variable speed drive is integrated within the fan.

Peak Amps @ 230V / 1PH / 50Hz.

The overall A-weighted sound pressure level is at a distance of 3m with spherical free-field propagation. It is expressed in dB re-20µPa and is presented for comparative purposes only.

QUIETFLOW SQSDCV



Performance, SFP & Electrical Data

Single Phase 220V to 277V / 50Hz or 60Hz

Product Code	Control Voltage V	Speed r/min	Airflow SFP	Airflow m ³ /s @ Static Pressure Pa.												At Best Efficiency Point		Motor Electrical Data		dBA @ 3m	
				0	25	50	75	100	150	200	250	300	350	400	500	Overall Eff %	Input kW	Peak Amps			
SQSDCV200-1ECL	10	3315	m ³ /s	0.293	0.290	0.286	0.281	0.276	0.263	0.242	0.206	0.173	0.152	0.135	0.109	36.4	0.172	1.59	Inlet	51	
			W/(L/s)	0.58	0.59	0.60	0.61	0.62	0.65	0.71	0.83	0.99	1.13	1.27	1.58				Outlet	53	
	8	2980	m ³ /s	0.258	0.253	0.249	0.243	0.237	0.219	0.190	0.154	0.127	0.106	0.087	0.040	35.6	0.118	1.20	Inlet	49	
			W/(L/s)	0.44	0.45	0.47	0.48	0.50	0.55	0.66	0.83	0.98	1.13	1.30	2.23				Outlet	50	
	5	1755	m ³ /s	0.150	0.141	0.128	0.108	0.078	0.026	-	-	-	-	-	-	33.2	0.030	0.31	Inlet	43	
			W/(L/s)	0.19	0.20	0.22	0.27	0.38	0.97	-	-	-	-	-	-				Outlet	43	
	2	565	m ³ /s	0.045	-	-	-	-	-	-	-	-	-	-	-	10.1	0.003	0.05	Inlet	-	
			W/(L/s)	0.07	-	-	-	-	-	-	-	-	-	-	-				Outlet	-	
			m ³ /s	0.045	-	-	-	-	-	-	-	-	-	-	10.1	0.003	0.05	Breakout	-		
			W/(L/s)	0.07	-	-	-	-	-	-	-	-	-	-				-			
SQSDCV250-1ECL	10	2490	m ³ /s	0.347	0.340	0.333	0.325	0.318	0.302	0.285	0.267	0.246	0.216	0.161	0.101	50.8	0.171	1.44	Inlet	49	
			W/(L/s)	0.49	0.50	0.51	0.52	0.54	0.57	0.60	0.64	0.70	0.79	1.06	1.69				Outlet	48	
	8	2505	m ³ /s	0.348	0.340	0.332	0.324	0.316	0.299	0.281	0.261	0.238	0.207	0.162	0.078	42.5	0.171	1.44	Inlet	47	
			W/(L/s)	0.49	0.51	0.52	0.53	0.54	0.57	0.60	0.65	0.72	0.83	1.06	1.86				Outlet	46	
	5	1545	m ³ /s	0.204	0.193	0.182	0.170	0.157	0.121	-	-	-	-	-	-	43.6	0.042	0.37	Inlet	36	
			W/(L/s)	0.18	0.20	0.22	0.24	0.27	0.35	-	-	-	-	-	-				Outlet	36	
	2	480	m ³ /s	0.063	-	-	-	-	-	-	-	-	-	-	-	12.6	0.004	0.04	Inlet	-	
			W/(L/s)	0.06	-	-	-	-	-	-	-	-	-	-	-				Outlet	-	
			m ³ /s	0.063	-	-	-	-	-	-	-	-	-	-	12.6	0.004	0.04	Breakout	-		
			W/(L/s)	0.06	-	-	-	-	-	-	-	-	-	-				-			
SQSDCV315-1ECL	10	2020	m ³ /s	0.652	0.636	0.619	0.601	0.583	0.542	0.498	0.451	0.401	0.349	0.296	0.178	33.0	0.358	1.78	Inlet	54	
			W/(L/s)	0.59	0.61	0.64	0.66	0.69	0.75	0.82	0.89	0.98	1.09	1.21	1.69				Outlet	53	
	8	1555	m ³ /s	0.500	0.477	0.452	0.427	0.401	0.343	0.278	0.201	0.105	-	-	-	31.5	0.172	0.84	Inlet	48	
			W/(L/s)	0.37	0.39	0.42	0.45	0.48	0.55	0.65	0.81	1.27	-	-	-				Outlet	47	
	5	870	m ³ /s	0.277	0.235	0.181	0.119	0.045	-	-	-	-	-	-	-	23.4	0.040	0.23	Inlet	39	
			W/(L/s)	0.15	0.18	0.23	0.33	0.69	-	-	-	-	-	-	-				Outlet	35	
	2	365	m ³ /s	0.086	-	-	-	-	-	-	-	-	-	-	-	-	0.010	0.12	Inlet	-	
			W/(L/s)	0.10	-	-	-	-	-	-	-	-	-	-	-				Outlet	-	
			m ³ /s	0.086	-	-	-	-	-	-	-	-	-	-	-	0.010	0.12	Breakout	-		
			W/(L/s)	0.10	-	-	-	-	-	-	-	-	-	-				-			

Data provided is at standard air density of 1.2 kg/m³.

Data in accordance with ErP 1253/2014 of the European Parliament. Product category is NRVU. Measurement category used to determine energy efficiency: D.

A variable speed drive is integrated within the fan.

Peak Amps @ 230V / 1PH / 50Hz.

The overall A-weighted sound pressure level is at a distance of 3m with spherical free-field propagation. It is expressed in dB re-20µPa and is presented for comparative purposes only.

QUIETFLOW SQSDCV



Performance, SFP & Electrical Data

Single Phase 220V to 277V / 50Hz or 60Hz

Product Code	Control Voltage V	Speed r/min	Airflow SFP	Airflow m ³ /s @ Static Pressure Pa.												At Best Efficiency Point		Motor Electrical Data	dBA @ 3m	
				0	25	50	75	100	150	200	250	300	350	400	500	Overall Eff %	Input kW	Peak Amps		
SQSDCV400-1ECL	10	2200	m ³ /s	1.051	1.041	1.031	1.021	1.010	0.988	0.963	0.936	0.906	0.872	0.831	0.724	42.7	0.926	4.39	Inlet	55
			W/(L/s)	0.76	0.77	0.79	0.80	0.82	0.86	0.89	0.94	0.98	1.04	1.10	1.28				Outlet	56
			Breakout																	
	8	1763	m ³ /s	0.835	0.824	0.811	0.798	0.784	0.752	0.714	0.664	0.598	0.514	0.428	0.245	42.9	-	2.39	Inlet	49
			W/(L/s)	0.50	0.52	0.53	0.55	0.57	0.61	0.66	0.73	0.82	0.94	1.08	1.56				Outlet	50
			Breakout																	
	5	1059	m ³ /s	0.506	0.479	0.449	0.414	0.371	0.238	-	-	-	-	-	-	36.9	-	0.61	Inlet	40
			W/(L/s)	0.22	0.25	0.27	0.30	0.34	0.51	-	-	-	-	-	-				Outlet	38
			Breakout																	
	2	354	m ³ /s	0.164	-	-	-	-	-	-	-	-	-	-	-	3.5	-	0.20	Inlet	-
			W/(L/s)	0.32	-	-	-	-	-	-	-	-	-	-	-				Outlet	-
			Breakout																	
SQSDCV500-1ECL	10	1422	m ³ /s	1.422	1.397	1.372	1.345	1.318	1.260	1.197	1.129	1.053	0.967	0.868	0.599	49.5	0.769	3.51	Inlet	45
			W/(L/s)	0.46	0.48	0.50	0.52	0.53	0.57	0.62	0.67	0.73	0.80	0.89	1.19				Outlet	47
			Breakout																	
	8	1157	m ³ /s	1.141	1.114	1.085	1.054	1.020	0.946	0.857	0.744	0.591	0.354	-	-	51.1	-	1.97	Inlet	41
			W/(L/s)	0.31	0.33	0.34	0.36	0.38	0.43	0.49	0.57	0.69	0.97	-	-				Outlet	42
			Breakout																	
	5	695	m ³ /s	0.687	0.637	0.577	0.501	0.393	-	-	-	-	-	-	-	44.7	-	0.51	Inlet	28
			W/(L/s)	0.13	0.15	0.18	0.21	0.27	-	-	-	-	-	-	-				Outlet	28
			Breakout																	
	2	234	m ³ /s	0.231	-	-	-	-	-	-	-	-	-	-	-	3.7	-	0.19	Inlet	-
			W/(L/s)	0.22	-	-	-	-	-	-	-	-	-	-	-				Outlet	-
			Breakout																	

Data provided is at standard air density of 1.2 kg/m³.

Data in accordance with ErP 1253/2014 of the European Parliament. Product category is NRVU. Measurement category used to determine energy efficiency: D.

A variable speed drive is integrated within the fan.

Peak Amps @ 400V / 3PH / 50Hz.

The overall A-weighted sound pressure level is at a distance of 3m with spherical free-field propagation. It is expressed in dB re-20μPa and is presented for comparative purposes only.

QUIETFLOW SQSDCV



Performance, SFP & Electrical Data

Three Phase 380V to 480V / 50Hz or 60Hz

Product Code	Control Voltage V	Speed r/min	Airflow SFP	Airflow m³/s @ Static Pressure Pa.												At Best Efficiency Point		Motor Electrical Data	dBA @ 3m	
				0	25	50	75	100	150	200	250	300	350	400	500	Overall Eff %	Input kW	Peak Amps		
SQSDCV500-3ECL	10	1799	m³/s	1.789	1.770	1.751	1.732	1.712	1.671	1.628	1.583	1.536	1.486	1.432	1.313	51.0	1.495	2.31	Inlet	51
			W/(L/s)	0.69	0.71	0.73	0.74	0.76	0.80	0.84	0.88	0.93	0.97	1.03	1.14				Outlet	57
			Breakout	57																
	8	1446	m³/s	1.419	1.397	1.373	1.349	1.323	1.269	1.210	1.145	1.072	0.988	0.889	0.620	51.8	-	1.29	Inlet	46
			W/(L/s)	0.45	0.47	0.49	0.50	0.52	0.57	0.61	0.66	0.72	0.79	0.87	1.15				Outlet	48
			Breakout	51																
	5	869	m³/s	0.852	0.813	0.768	0.718	0.660	0.500	0.197	-	-	-	-	-	47.5	-	0.47	Inlet	34
			W/(L/s)	0.19	0.21	0.23	0.25	0.28	0.37	0.73	-	-	-	-	-				Outlet	34
			Breakout	37																
	2	292	m³/s	0.284	-	-	-	-	-	-	-	-	-	-	-	14.3	-	0.16	Inlet	-
			W/(L/s)	0.08	-	-	-	-	-	-	-	-	-	-	-				Outlet	-
			Breakout	-																

Data provided is at standard air density of 1.2 kg/m³.

Data in accordance with ErP 1253/2014 of the European Parliament. Product category is NRVU. Measurement category used to determine energy efficiency: D.

A variable speed drive is integrated within the fan.

Peak Amps @ 400V / 3PH / 50Hz.

The overall A-weighted sound pressure level is at a distance of 3m with spherical free-field propagation. It is expressed in dB re-20µPa and is presented for comparative purposes only.

QUIETFLOW SQSDCV



Sound Data

Single Phase 220V to 277V / 50Hz or 60Hz

Product Code	Control Voltage V		Sound Power Level dBW @ Octave Band Hz							Total dB	
			63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz		8kHz
SQSDCV100-1ECL	10	Inlet	75	75	79	69	54	50	44	44	82
		Outlet	83	80	76	67	57	51	43	39	85
		Breakout	62	70	70	62	57	51	48	47	74
	8	Inlet	73	74	77	59	52	48	43	41	80
		Outlet	85	79	77	66	55	49	41	37	87
		Breakout	61	70	70	61	56	51	47	46	74
	5	Inlet	66	69	73	47	41	38	32	30	75
		Outlet	73	72	69	54	42	40	31	25	76
		Breakout	51	65	66	49	47	38	34	31	69
SQSDCV125-1ECL	10	Inlet	82	77	77	62	53	49	44	44	84
		Outlet	84	77	81	72	55	51	42	40	86
		Breakout	60	70	67	60	57	51	47	46	72
	8	Inlet	72	78	77	60	52	48	42	42	81
		Outlet	83	76	75	63	53	49	41	37	84
		Breakout	58	70	67	59	56	51	46	45	72
	5	Inlet	69	71	78	51	41	37	31	29	79
		Outlet	72	68	69	52	40	40	31	27	75
		Breakout	51	60	65	48	44	37	33	29	66
SQSDCV150-1ECL	10	Inlet	89	74	75	65	56	52	48	47	89
		Outlet	83	77	79	68	56	54	50	48	85
		Breakout	66	64	66	62	57	52	47	44	71
	8	Inlet	74	72	73	58	53	49	45	44	78
		Outlet	80	75	79	65	53	52	48	44	83
		Breakout	62	62	66	57	54	49	44	40	69
	5	Inlet	65	67	73	49	41	38	33	30	75
		Outlet	69	72	76	54	42	44	37	33	78
		Breakout	47	56	62	49	42	36	30	24	63
SQSDCV200-1ECL	10	Inlet	80	79	78	67	60	54	52	52	84
		Outlet	90	81	80	68	58	55	51	48	91
		Breakout	63	67	68	62	58	53	48	45	72
	8	Inlet	77	78	76	64	56	50	49	49	82
		Outlet	80	79	78	63	55	51	49	46	84
		Breakout	61	65	67	58	55	50	45	42	70
	5	Inlet	68	71	71	52	43	37	38	35	75
		Outlet	68	74	70	53	43	41	36	30	76
		Breakout	51	60	63	49	43	37	34	32	65

Data provided at standard air density of 1.2 Kg/m³.
 Tests and preparation of the sound data have been carried out in accordance with BS 848 Part 2:1985 at 50% peak pressure.
 The Sound Power Level Spectra are in dB re-1pW.

QUIETFLOW SQSDCV



Sound Data

Single Phase 220V to 277V / 50Hz or 60Hz

Product Code	Control Voltage V		Sound Power Level dB @ Octave Band Hz								Total dB
			63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	
SQSDCV250-1ECL	10	Inlet	78	76	77	64	55	50	49	47	82
		Outlet	80	76	75	64	55	54	49	44	82
		Breakout	59	65	71	60	55	49	43	41	73
	8	Inlet	75	74	75	59	50	45	45	44	80
		Outlet	76	72	74	60	51	49	45	40	79
		Breakout	55	63	70	56	50	44	38	36	71
	5	Inlet	67	71	57	49	38	33	38	27	73
		Outlet	66	71	56	48	38	37	34	33	72
		Breakout	46	56	51	44	38	30	28	22	58
SQSDCV315-1ECL	10	Inlet	78	77	83	63	50	52	48	47	85
		Outlet	80	77	81	67	60	52	47	44	85
		Breakout	68	70	76	64	58	53	48	46	78
	8	Inlet	74	84	68	55	44	45	42	40	85
		Outlet	75	82	68	59	54	45	40	36	83
		Breakout	63	73	65	58	53	47	41	39	74
	5	Inlet	67	75	55	43	34	35	30	19	76
		Outlet	67	71	55	46	40	30	27	18	73
		Breakout	55	60	52	45	40	33	26	22	62
SQSDCV400-1ECL	10	Inlet	81	80	83	69	61	58	56	57	86
		Outlet	83	79	82	75	68	62	56	52	87
		Breakout	72	73	78	70	65	60	51	50	81
	8	Inlet	78	80	76	63	54	52	50	50	83
		Outlet	79	78	75	69	60	54	50	45	83
		Breakout	68	72	72	64	58	52	45	44	76
	5	Inlet	68	75	62	48	43	42	38	24	76
		Outlet	70	71	61	54	47	40	34	22	74
		Breakout	58	66	58	49	45	38	35	28	67
SQSDCV500-1ECL	10	Inlet	77	76	67	62	57	54	51	51	80
		Outlet	77	80	71	64	58	51	46	42	82
		Breakout	74	80	74	66	60	54	48	44	82
	8	Inlet	74	72	63	57	54	49	46	48	76
		Outlet	73	74	66	58	53	45	40	39	77
		Breakout	69	75	68	61	56	49	43	41	77
	5	Inlet	65	61	49	43	38	37	37	29	67
		Outlet	66	60	52	44	29	32	30	27	67
		Breakout	65	60	53	47	42	36	36	25	66

Data provided at standard air density of 1.2 Kg/m³.
 Tests and preparation of the sound data have been carried out in accordance with BS 848 Part 2:1985 at 50% peak pressure.
 The Sound Power Level Spectra are in dB re-1pW.

QUIETFLOW SQSDCV



Sound Data

Three Phase 380V to 480V / 50Hz or 60Hz

Product Code	Control Voltage V		Sound Power Level dBW @ Octave Band Hz							Total dB	
			63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz		8kHz
SQSDCV500-3ECL	10	Inlet	81	80	75	68	63	62	60	53	84
		Outlet	82	84	85	71	66	61	58	47	89
		Breakout	80	82	83	75	69	63	57	53	87
	8	Inlet	78	77	67	63	57	55	52	50	81
		Outlet	77	81	71	65	58	52	47	41	83
		Breakout	75	80	75	69	63	57	52	47	82
	5	Inlet	70	66	56	50	43	45	42	31	72
		Outlet	69	66	58	51	44	40	34	27	71
		Breakout	66	68	61	54	49	44	38	31	71

Data provided at standard air density of 1.2 kg/m³.
 Tests and preparation of the sound data have been carried out in accordance with BS 848 Part 2:1985 at 50% peak pressure.
 The Sound Power Level Spectra are in dB re-1pW.




QUIETFLOW SQSDCV



Dimensional Data

Single & Three Phase

Product Code	A	B	C	D	E	F	G	H	J	K	L	Weight kg
SQSDCV100-1ECL	513	355	261	97	394	375	533	606	16	8	50	14
SQSDCV125-1ECL	513	355	261	122	394	375	533	606	16	8	50	14
SQSDCV150-1ECL	513	355	261	147	394	375	533	606	16	8	50	14
SQSDCV200-1ECL	588	401	303	197	440	421	608	681	16	8	50	17
SQSDCV250-1ECL	588	401	333	247	440	421	608	681	16	8	50	19
SQSDCV315-1ECL	639	490	400	312	561	527	677	732	16	10	79	29
SQSDCV400-1ECL	704	575	472	397	646	612	742	797	16	10	79	44
SQSDCV500-1ECL	884	755	601	497	826	792	922	977	16	10	79	65
SQSDCV500-3ECL	884	755	601	497	826	792	922	977	16	10	79	65

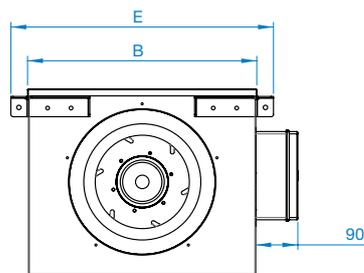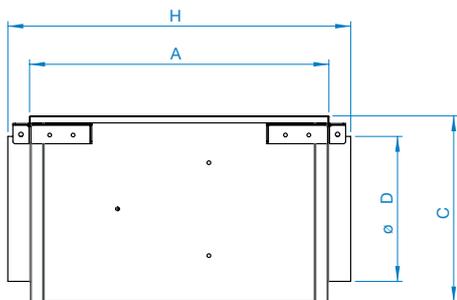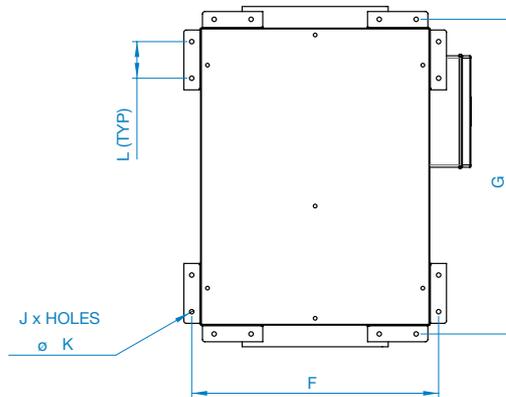

Dimensions are in mm.

QUIETFLOW SQSDCV



EcoDesign 1253/2014 - Information Requirements

REV2 01/05/2018

A	B	C*			D	E	F	G	H	I	J	K	L	N	O	P	Q	R	S
		C.1	C.2	C.3															
Elta Fans Ltd	SQSDCV100-1ECL	NRVU	UVU	2018	Variable-Speed	None	n/a	0.040	0.029	n/a	5.09	148	n/a	24.0	<2	n/a	n/a	65	www.eltafans.com
Elta Fans Ltd	SQSDCV125-1ECL	NRVU	UVU	2018	Variable-Speed	None	n/a	0.070	0.171	n/a	5.70	747	n/a	34.9	<2	n/a	n/a	63	www.eltafans.com
Elta Fans Ltd	SQSDCV150-1ECL	NRVU	UVU	2018	Variable-Speed	None	n/a	0.100	0.174	n/a	5.66	663	n/a	43.2	<2	n/a	n/a	63	www.eltafans.com
Elta Fans Ltd	SQSDCV200-1ECL	NRVU	UVU	2018	Variable-Speed	None	n/a	0.120	0.172	n/a	3.82	458	n/a	36.4	<2	n/a	n/a	64	www.eltafans.com
Elta Fans Ltd	SQSDCV250-1ECL	NRVU	UVU	2018	Variable-Speed	None	n/a	0.220	0.171	n/a	4.48	340	n/a	50.8	<2	n/a	n/a	64	www.eltafans.com
Elta Fans Ltd	SQSDCV315-1ECL	NRVU	UVU	2018	Variable-Speed	None	n/a	0.240	0.172	n/a	3.08	226	n/a	31.5	<2	n/a	n/a	69	www.eltafans.com
Elta Fans Ltd	SQSDCV400-1ECL	NRVU	UVU	2018	Variable-Speed	None	n/a	0.706	0.926	n/a	5.61	514	n/a	42.7	<2	n/a	n/a	55	www.eltafans.com
Elta Fans Ltd	SQSDCV500-1ECL	NRVU	UVU	2018	Variable-Speed	None	n/a	0.863	0.769	n/a	4.40	402	n/a	49.5	<2	n/a	n/a	45	www.eltafans.com
Elta Fans Ltd	SQSDCV500-3ECL	NRVU	UVU	2018	Variable-Speed	None	n/a	1.088	1.495	n/a	5.54	652	n/a	51.0	<2	n/a	n/a	51	www.eltafans.com

- A** Manufacturer's Name
- B** Model Identifier
- C.1** RVU or NRVU
- C.2** UVU or BVU
- C.3** ErP Compliance
- D** Type of Drive (MSD or VSD)
- E** Type of HRS (Run Around or Other or None)
- F** Thermal Efficiency (% or N/A)
- G** Nominal Flow Rate (m³/s)
- H** Effective Electrical Power Input (kW)
- I** SFP Int (W/m³/s)
- J** Face Velocity (m/s)
- K** Nominal External Pressure (Pa)
- L** Internal Pressure Drop of Ventilation Components (Pa)
- N** Static Efficiency of Fan Used 327/2011
- O** Maximum External Leakage Rate (%)
- P** Energy Classification of Filters
- Q** Description of Visual Filter warning
- R** Casing Sound Power Level (LWA)
- S** Website for Disassembly Instructions

* Declared Typology C

QUIETFLOW SQSDCV



Accessories

Single Phase

Product Code	Box Fan AV Mounts (set of 4)	Box Fan Flexible Connectors (each)	Electric Heater Battery	Fast Clamps (each)	Panel Filter
SQSDCV100-1ECL	062-SEL03	018-0100-FLEX	018-CV10-06-1M	018-100-CLAMP	018-0100-FILT-P
SQSDCV125-1ECL	062-SEL03	018-0125-FLEX	018-CV12-12-1M	018-125-CLAMP	018-0125-FILT-P
SQSDCV150-1ECL	062-SEL03	018-0150-FLEX	018-CV15-27-1M	018-150-CLAMP	018-0150-FILT-P
SQSDCV200-1ECL	062-SEL03	018-0200-FLEX	018-CV20-30-1M	018-200-CLAMP	018-0200-FILT-P
SQSDCV250-1ECL	062-SEL03	018-0250-FLEX	018-CV25-30-1M	018-250-CLAMP	018-0250-FILT-P
SQSDCV315-1ECL	062-SEL03	018-0315-FLEX	018-CV31-30-1M	018-315-CLAMP	018-0315-FILT-P
			018-CV31-45-1M		
			018-CV31-90-3M		
SQSDCV400-1ECL	062-SEL04	018-0400-FLEX	018-CV40-90-3M	018-400-CLAMP	018-0400-FILT-P
			018-CV40-120-3E		
SQSDCV500-1ECL	062-SEL05	018-0500-FLEX	-	018-500-CLAMP	018-0500-FILT-P

Product Code	Spigot Silencer 300mm Long	Spigot Silencer 600mm Long	Spigot Silencer 900mm Long	Spigot Silencer 1200mm Long	Wiring Diagram
SQSDCV100-1ECL	068-0100-JF1	068-0100-JF2	068-0100-JF3	068-0100-JF4	152-709
SQSDCV125-1ECL	068-0125-JF1	068-0125-JF2	068-0125-JF3	068-0125-JF4	152-709
SQSDCV150-1ECL	068-0150-JF1	068-0150-JF2	068-0150-JF3	068-0150-JF4	152-709
SQSDCV200-1ECL	068-0200-JF1	068-0200-JF2	068-0200-JF3	068-0200-JF4	152-709
SQSDCV250-1ECL	068-0250-JF1	068-0250-JF2	068-0250-JF3	068-0250-JF4	152-709
SQSDCV315-1ECL	068-0315-JF1	068-0315-JF2	068-0315-JF3	068-0315-JF4	152-709
SQSDCV400-1ECL	068-0400-JF1	068-0400-JF2	068-0400-JF3	068-0400-JF4	152-709
SQSDCV500-1ECL	068-0500-JF1	068-0500-JF2	068-0500-JF3	068-0500-JF4	152-709

Three Phase

Product Code	Box Fan AV Mounts (set of 4)	Box Fan Flexible Connectors (each)	Electric Heater Battery	Fast Clamps (each)	Panel Filter
SQSDCV500-3ECL	062-SEL05	018-0500-FLEX	-	018-500-CLAMP	018-0500-FILT-P

Product Code	Spigot Silencer 300mm Long	Spigot Silencer 600mm Long	Spigot Silencer 900mm Long	Spigot Silencer 1200mm Long	Wiring Diagram
SQSDCV500-3ECL	068-0500-JF1	068-0500-JF2	068-0500-JF3	068-0500-JF4	152-709

DCV Accessories

DCV Accessories	CO ₂ Transmitter	DCV LCD Display	Humidity Transmitter	Presence Detector	Pressure Transmitter	Room Humidistat	Temperature Transmitter
All DCV products	149-DCV-CO2	149-DCV-MK3-CTRL	149-DCV-HRT	149-DCV-PIR	149-DCV-DPT150	149-DCV-H1	149-DCV-TRT


BOX FAN AV MOUNTS

Accessories



- Fits directly to fan
- Rubber with steel insert
- Supplied as set of 4 or 6, complete with fixings

Product Code	A	B	C	D	Weight kg
062-SEL03	70	32	25	M8	0.210
062-SEL04	60	20	25	M8	0.186
062-SEL05	60	20	25	M8	0.187

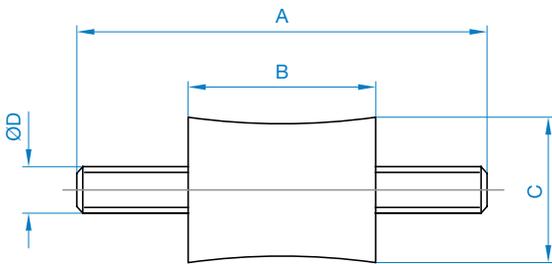

Dimensions are in mm.



BOX FAN FLEXIBLE CONNECTOR

Accessories

- Fix directly on to spigot
- Provides flexible connection between fan and accessory or duct
- PVC coated polyester with galvanised sheet steel



Product Code	Fan Dia. A	B	Weight kg
018-0100-FLEX	100	150	0.2
018-0125-FLEX	125	150	0.2
018-0150-FLEX	150	150	0.2
018-0200-FLEX	200	150	0.3
018-0250-FLEX	250	150	0.4
018-0315-FLEX	315	150	0.5
018-0400-FLEX	400	150	0.7
018-0500-FLEX	500	150	1.0

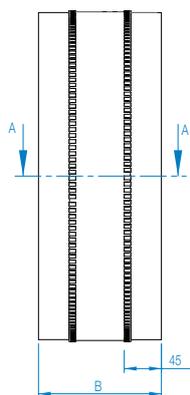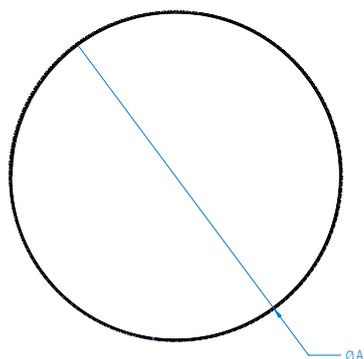

Dimensions are in mm.

ELECTRIC HEATER BATTERY



Accessories



Type

CV – (E/M) duct heater with casing of Aluzinc-coated sheet steel and stainless steel heater element to EN 1.4301. The duct heaters conform to air tightness class C to EN 15727. Control takes place by an external regulator and sensor that must be ordered separately.

Product Code	kW	Phase	Airflow @ m ³ /s		A	Weight kg
			Min	Max		
018-CV10-06-1M	0.6	1	0.012	0.046	100	2.3
018-CV12-12-1M	1.2	1	0.019	0.093	125	3.0
018-CV15-27-1M	2.7	1	0.031	0.208	150	4.2
018-CV20-30-1M	3.0	1	0.047	0.231	200	5.9
018-CV25-30-1M	3.0	1	0.075	0.231	250	7.8
018-CV31-30-1M	3.0	1	0.115	0.231	315	8.3
018-CV31-45-1M	4.5	1	0.115	0.347	315	8.3
018-CV31-90-3M	9.0	3	0.115	0.694	315	8.3
018-CV35-90-3M	9.0	3	0.192	0.694	355	9.1
018-CV40-90-3M	9.0	3	0.192	0.694	400	9.7
018-CV40-120-3E	12.0	3	0.192	0.926	400	9.7

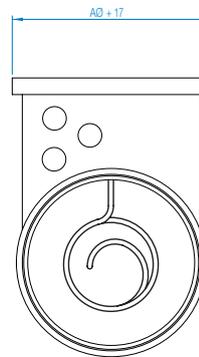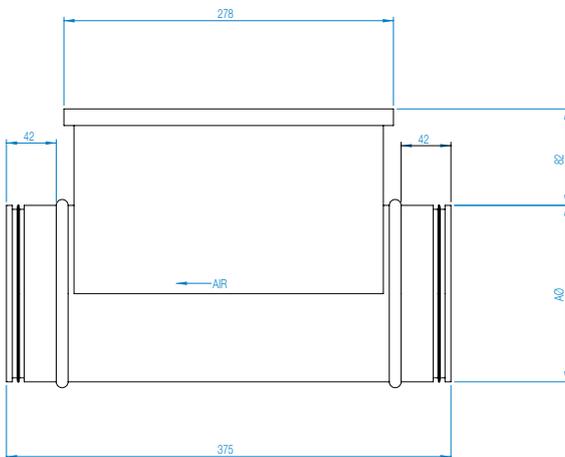


FAST CLAMPS

Accessories

- For quick connection of spigotted fans to circular duct or accessories
- Galvanised steel circular duct clamp with foam lining




Product Code	Fan Size	A Dia.	B Dia.	Weight kg
018-100-CLAMP	100	100	124	0.25
018-125-CLAMP	125	125	149	0.29
018-150-CLAMP	150	150	174	0.33
018-200-CLAMP	200	200	224	0.42
018-250-CLAMP	250	250	274	0.49
018-315-CLAMP	315	315	339	0.59
018-400-CLAMP	400	400	424	0.74
018-500-CLAMP	500	500	524	0.87

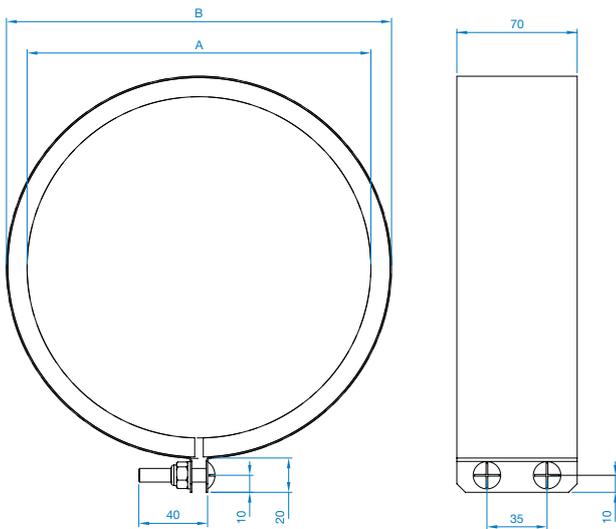

Dimensions are in mm.


PANEL FILTER

Accessories



- Galvanised steel casing
- Filter media to BS EN 779 rating G2 with 85% arrestance
- Filter access with removable panel

Product Code	Fan Dia. A	B	C	D	Weight kg
018-0100-FILT-P	100	155	200	200	2
018-0125-FILT-P	125	155	200	200	2
018-0150-FILT-P	150	155	250	250	2
018-0200-FILT-P	200	155	250	250	2
018-0250-FILT-P	250	200	300	300	3
018-0315-FILT-P	315	300	440	440	8
018-0400-FILT-P	400	400	440	440	8
018-0500-FILT-P	500	500	550	550	11

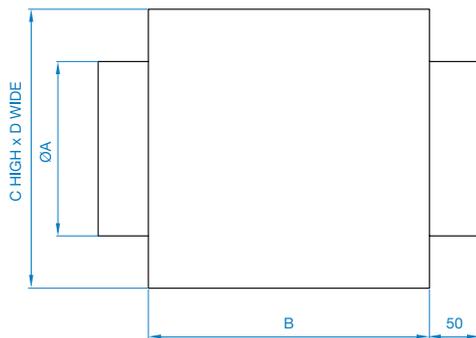

Dimensions are in mm.

SPIGOT SILENCER

Accessories

- Small metric range of attenuators with spigot connection
- Ideal for small fans
- Ideal for cross talk elimination
- Ideal for flexible or spiral ducting



Construction

Both types are rigidly constructed in galvanised sheet steel, with a highly absorbent sound attenuating lining between the outer casing and the inner perforated steel lining. The end faces of the silencer do not have threaded holes for fixings, but has a steel spigot for ease of mounting.

Melinex lined silencers must be used to prevent grease impregnation into the acoustic media for kitchen extract applications as prescribed in DW/172 HVAC Specification For Kitchen Ventilation Systems. For Melinex insertion losses, please contact Elta Fans. Silencers can be provided with differing lengths: 300, 600, 900 and 1200mm.

Silencer Attenuation

To determine the sound level of a fan fitted with a silencer, the dynamic insertion loss should be subtracted from the sound power level spectrum (dBW) of the fan. This should be done for the entire octave band mid-frequency spectrum. The fan dBW ratings and silencer attenuation apply equally to in duct applications, with a silencer connected between the fan and the duct system.

Dynamic Insertion Loss

The silencer attenuation is defined as the “dynamic insertion loss”. The values quoted in the tables represent the difference between the sound power level of a fan and silencer combination (dBW) and that of the fan alone (dBW). The dynamic insertion losses shown are the attenuations recorded under ideal working conditions. The achieved attenuation will vary according to the air velocity and flow pattern in the airways. Noise regeneration can occur at higher velocities, especially in EP silencers.

Square / Rectangular Silencers

In highly noise sensitive areas, where the circular silencers cannot achieve the necessary attenuation levels, Elta Fans can design and build optional splitter silencers for greater effect.

SPIGOT SILENCER

Dynamic Insertion Loss

Spigot Ø100-500

Product Code	Length	Insertion Loss @ Octave band (Hz)							
		63	125	250	500	1K	2K	4K	8K
068-0100-JF1	300mm	-3	-4	-9	-17	-23	-26	-25	-14
068-0100-JF2	600mm	-5	-8	-15	-33	-39	-40	-36	-20
068-0100-JF3	900mm	-10	-13	-21	-40	-45	-40	-36	-24
068-0100-JF4	1200mm	-12	-15	-23	-42	-47	-42	-38	-26
068-0125-JF1	300mm	-3	-3	-8	-16	-21	-24	-22	-12
068-0125-JF2	600mm	-4	-8	-13	-30	-35	-35	-31	-15
068-0125-JF3	900mm	-9	-12	-18	-37	-41	-38	-34	-20
068-0125-JF4	1200mm	-11	-15	-21	-40	-46	-41	-36	-23
068-0150-JF1	300mm	-3	-3	-6	-14	-19	-23	-22	-11
068-0150-JF2	600mm	-4	-7	-12	-23	-30	-36	-31	-15
068-0150-JF3	900mm	-8	-9	-15	-31	-37	-37	-34	-18
068-0150-JF4	1200mm	-10	-14	-17	-34	-41	-40	-36	-20
068-0200-JF1	300mm	-2	-3	-6	-13	-17	-20	-18	-9
068-0200-JF2	600mm	-4	-6	-10	-20	-27	-32	-20	-11
068-0200-JF3	900mm	-7	-9	-14	-32	-39	-36	-26	-15
068-0200-JF4	1200mm	-10	-12	-17	-35	-41	-44	-28	-16
068-0250-JF1	300mm	-2	-3	-6	-12	-16	-19	-17	-8
068-0250-JF2	600mm	-3	-6	-10	-19	-25	-29	-18	-10
068-0250-JF3	900mm	-5	-8	-12	-24	-30	-30	-22	-14
068-0250-JF4	1200mm	-7	-10	-15	-31	-37	-38	-26	-15
068-0315-JF1	300mm	-1	-3	-6	-12	-15	-18	-16	-8
068-0315-JF2	600mm	-3	-5	-8	-16	-21	-22	-16	-14
068-0315-JF3	900mm	-4	-7	-10	-20	-31	-28	-17	-14
068-0315-JF4	1200mm	-6	-9	-14	-23	-32	-32	-18	-15
068-0400-JF1	300mm	-1	-2	-4	-11	-15	-15	-12	-8
068-0400-JF2	600mm	-2	-4	-7	-14	-17	-18	-14	-11
068-0400-JF3	900mm	-3	-6	-9	-18	-26	-23	-15	-12
068-0400-JF4	1200mm	-5	-8	-13	-22	-30	-27	-17	-12
068-0500-JF1	300mm	-1	-1	-3	-10	-14	-14	-11	-7
068-0500-JF2	600mm	-2	-4	-6	-14	-16	-16	-13	-11
068-0500-JF3	900mm	-3	-6	-8	-17	-24	-21	-15	-11
068-0500-JF4	1200mm	-4	-8	-12	-19	-28	-23	-16	-12

For sizes 560-710, please contact Elta Fans.

SPIGOT SILENCER

Dimensional Data

Product Code	Fan Dia.	A	B	C	D	Weight kg
068-0100-JF1	100	98	204	300	40	2.5
068-0100-JF2	100	98	204	600	40	4.6
068-0100-JF3	100	98	204	900	40	6.7
068-0100-JF4	100	98	204	1200	40	8.7
068-0125-JF1	125	123	230	300	40	2.9
068-0125-JF2	125	123	230	600	40	5.4
068-0125-JF3	125	123	230	900	40	7.8
068-0125-JF4	125	123	230	900	40	10.2
068-0150-JF1	150	148	255	300	40	3.4
068-0150-JF2	150	148	255	600	40	6.1
068-0150-JF3	150	148	255	900	40	8.9
068-0150-JF4	150	148	255	1200	40	11.6
068-0200-JF1	200	198	305	300	40	4.2
068-0200-JF2	200	198	305	600	40	7.6
068-0200-JF3	200	198	305	900	40	11.0
068-0200-JF4	200	198	305	1200	40	14.5
068-0250-JF1	250	248	355	300	40	5.0
068-0250-JF2	250	248	355	600	40	9.1
068-0250-JF3	250	248	355	900	40	13.2
068-0250-JF4	250	248	355	1200	40	17.3
068-0315-JF1	315	313	420	300	40	6.1
068-0315-JF2	315	313	420	600	40	11.1
068-0315-JF3	315	313	420	900	40	16.1
068-0315-JF4	315	313	420	1200	40	21.0
068-0400-JF1	400	398	505	300	40	7.5
068-0400-JF2	400	398	505	600	40	13.6
068-0400-JF3	400	398	505	900	40	19.8
068-0400-JF4	400	398	505	1200	40	25.9



For 500 data, please contact Elta Fans.
Dimensions are in mm.

CO₂ TRANSMITTER

Accessories



- Power Supply 24V AC or DC
- CO₂ Level 0 - 2000ppm
- Temperature 0 - 50°C
- Excellent Long Term Stability
- Snap-in Cover

Overview

149-DCV-CO2 is a room transmitter for measuring carbon dioxide levels in air with an output signal 0 - 10V DC.

Function

149-DCV-CO2 with patented auto calibration process set new standards in CO₂ measuring for HVAC applications. The sensor is mounted in the cover-part of the casing. The cover is easy to detach from the back by means of snap-in grips and detachable terminals. This makes mounting easier. Furthermore, no cables have to be disconnected, which simplifies service and replacement.

Applications

The CO₂ level gives a direct indication of the indoor air quality. With this basic information, the ventilation can be controlled with high precision and the air quality improved. At the same time, the supply air will only be increased when necessary and the energy costs will thereby be reduced. 149-DCV-CO2 is suitable in environments such as cinemas, schools, conference rooms, assembly halls etc.

Measuring Principle

The CO₂ concentration is measured by means of infrared light, a technique that measures the absorption in gases. It has a reference measuring system that compensates values in relation to changes in light intensity.


Advantages

- Very high accuracy
- Exact identification of detected gas
- Low risk for contamination
- Short response time
- High long term stability
- Long calibration interval (>5 years)

CO₂ TRANSMITTER

Accessories


Product Code	Supply Voltage	Power Consumption W	Ambient Temperature °C	Ambient Humidity % RH	Temperature Dependence ppm CO ₂ /°C	Storage Temperature °C	Long Term Stability ppm/year
149-DCV-CO2	24V AC +/- 15%, 50/60Hz or 15/35V DC	3	-5 - +55	0 - 90 Not Condensating	typ. 5	-40 - 70	typ. 20
Product Code	Response Time	Warm-up Time	Protection Class	Measuring Principle	Working Range CO ₂ ppm	Accuracy CO ₂ ppm	Outputs Signal ppm
149-DCV-CO2	< 90s	< 5mins	IP30	NDIR (Non-Dispersive Infrared Technology)*	0 - 2000	< ± (50 +2% of measuring value)	CO ₂ 0 - V DC referring to 0 - 2000

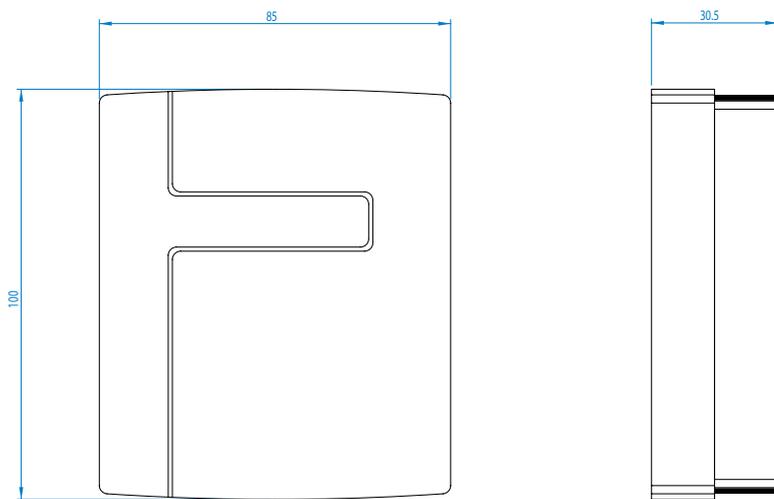

Installation

149-DCV-CO2 should be mounted in a location with good air circulation and one that can be expected to give representative readings. 149-DCV-CO2 may be mounted either on a wall-box or straight on the wall. To remove the front cover, use a 3mm flat-blade screwdriver to depress the locking tongue in the lower part of the casing (see arrow figure). Press and twist the screwdriver and at the same time pull the bottom part of the front outwards. When the bottom end of the front is free from the casing bottom part, slide the cover towards the top of the casing to free the hooks holding the upper edge of the front cover.

Wiring Diagram

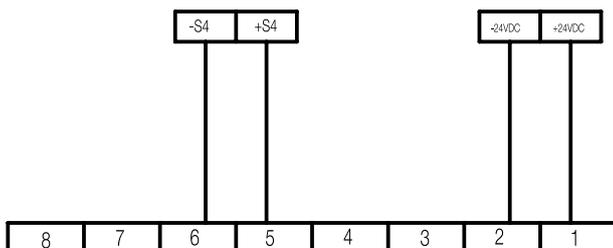

This product conforms with the requirements of European EMC standards CENELEC EN 61000-6-1 and EN 61000-6-3 and carries the CE mark. N.B. System neutral and signal neutral should be separately wired, because of current peaks in the supply wires. Screw terminal: Max. 1.5mm².

DCV LCD DISPLAY


Overview

- Multi-function remote control panel with LCD display
- Supplied as standard with DCV products
- Suitable for surface mounting



Programmable Control Functions

Product Code	Main Menu
149-DCV-MK3-CTRL	Language
	Date / Time
	P00: Fan Mode
	P01: Application
	P02: Sensor Range MIN
	P03: Sensor Range MAX
	P04: Setpoint
	P05: PID Control
	P06: Fixed Speed Value
	P07: Run On Time (minutes)
	P08: Min Fan Speed
	P09: Max Fan Speed
	P10: Slave Min Fan Speed
	P11: Slave Max Fan Speed
	P12: Temperature Input
	Weekly Timer
	Working Hours Counter
	Save Settings
	Load Settings
	Restore Default Settings
Contrast	
Debug Page	

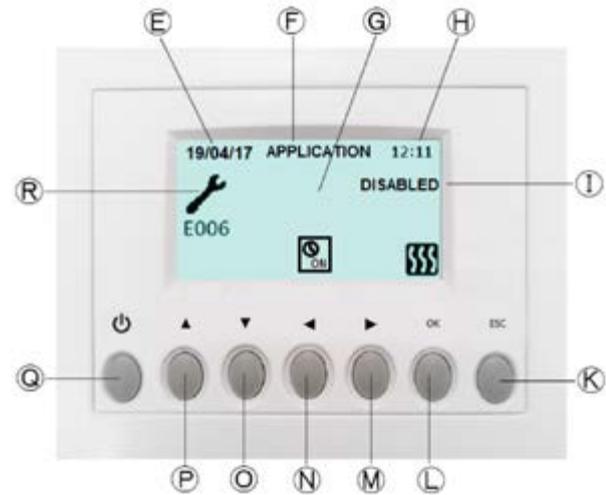

E	DATE: shows the current date
F	APPLICATION: shows the current application
G	MODE: shows auto fan [all modes except manual] or manual position
H	TIME: shows the time
I	Remote Enable: shows remote enable is disabled
K	ESC key: to exit and go back to the previous menu
L	OK key: to enter the selected menu
N	Menu scroll LEFT
O	To go DOWN in menus
P	To go UP in menus
Q	On / Off: power the unit (hold for 5 seconds)
R	FAULT: shows error alarm, refer to error codes

Sensors


The DCV systems various sensors provide continuous real time feedback monitoring of the ambient air conditions through temperature, humidity, CO₂ or pressure in the occupied space.

When powered in auto mode, the CTRL-DSP displays as follows (Auto mode refers to applications 0-10V, Pressure CO₂, RH and Temperature).

HUMIDITY TRANSMITTER

Accessories

- Output Signal 0 - 10 V DC
- Protection Class IP30
- Good Long Term Stability
- Snap-on Cover
- Resistant to contamination



Overview

The HRT room transmitters for use with our Demand Control Ventilation systems are for measuring humidity or temperature in a room.

Relative Humidity

149-DCV-HRT transmitters have a capacitive thin-film element which gives a signal that is proportional to the relative humidity. The measuring signal is converted by the built-in electronics to output signal 0...10V. The sensor element has rapid response to changes in humidity and excellent long-term stability. The element also has good durability in contaminated environments.

Supply Voltage

For output signal 0...10 V, the transmitter should be supplied with 24 V AC $\pm 10\%$ or 15...35 V DC. The transmitter has automatic adaptation to the connected voltage.

Accuracy at 20%

Humidity: $\pm 3\%$ RH, Temperature: $\pm 0.4^\circ\text{C}$ ($\pm 0.3^\circ\text{C}$ with temperature sensor PT1000).

Installation

The transmitter should be mounted in a location with good air circulation where it can be expected to give a representative reading. It may be mounted on a wall-box or directly on the wall. To remove the front cover, depress the locking tongue in the lower part of the casing using a 3 mm flat-blade screwdriver. Press and twist the screwdriver and at the same time pull the bottom part of the casing, slide the cover towards the top of the casing to free the hooks holding the upper edge of the front cover.


HUMIDITY TRANSMITTER

Accessories


Product Code	Type	Output Signal V	Supply Voltage U_v	Power Consumption W	Electrical Connection mm ²	Storage Temperature	Protection Class
149-DCV-HRT	Humidity & Temperature Transmitter	0 - 10	24 V AC $\pm 10\%$ or 15...35 V DC	< 1 W	Screw terminals max 1.5 (AWG 16)	-25 - 60	IP30

Mode of Operation	Analogue Output	Working Range
Relative Humidity	0...10 V, $I_L < 1$ mA (0...100% RH)	0...50% RH

Dimensions

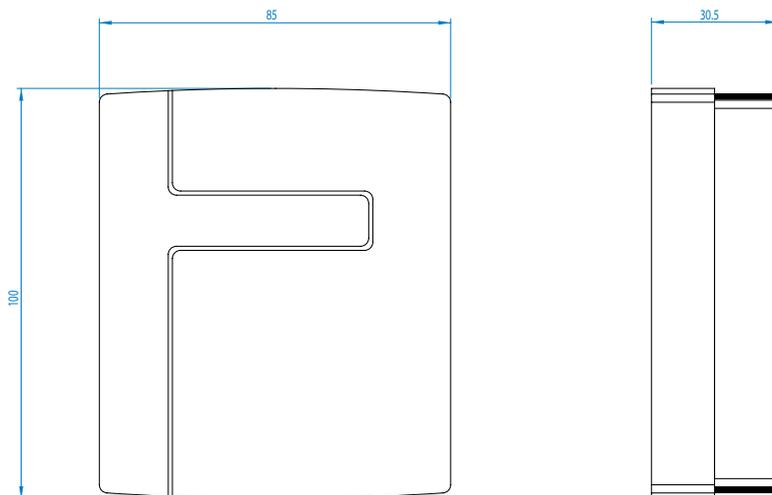

Wiring Diagram

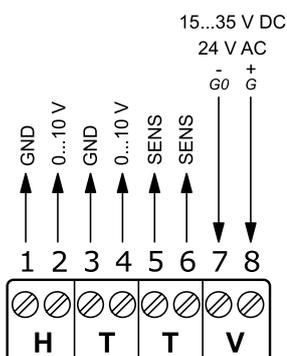


This product conforms with the requirements of European EMC standards CENELEC EN 61000-6-1 and EN 61000-6-3 and carries the CE mark.


PANEL FILTER

Accessories

- Galvanised steel casing
- Filter media to BS EN 779 rating G2 with 85% arrestance
- Filter access with removable panel



Product Code	Fan Dia. A	B	C	D	Weight kg
018-0100-FILT-P	100	155	200	200	2
018-0125-FILT-P	125	155	200	200	2
018-0150-FILT-P	150	155	250	250	2
018-0200-FILT-P	200	155	250	250	2
018-0250-FILT-P	250	200	300	300	3
018-0315-FILT-P	315	300	440	440	8
018-0400-FILT-P	400	400	440	440	8
018-0500-FILT-P	500	500	550	550	11

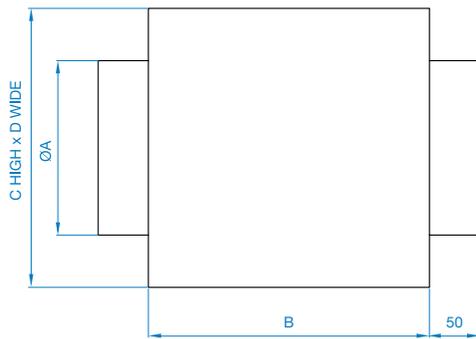

Dimensions are in mm.

PRESENCE DETECTOR

Accessories

- Power Supply 24V AC or DC
- Intended for wall or ceiling mounted
- Unobtrusive design
- Potential-free, changeover relay
- Both relay on-delay and/or relay off-delay, can be individually set



Overview

149-DCV-PIR is a presence detector designed for Demand Control Ventilation systems.

Function

The PIR is a presence detector designed for automatic ventilation control of DCV systems. It saves money and gives higher comfort in premises which require forced ventilation for shorter periods of time, such as conference rooms, assembly-halls etc. The unit provides a changeover relay signal output for start/stop of fan or similar equipment. It can be wall or corner mounted with 110°, 15m detection range.


Range Adjustments

In order to suit different rooms or areas, the detection range of PIR can be adjusted by changing the direction of the sensor. To change the sensor direction, release the screw on the mounting bracket and then carefully move the sensor to the direction desired.

On / Off Delay

The ON and OFF delays are designed to provide smarter energy management of DCV systems. ON delay is the time given to the sensor to certify the occupancy, before it activates the output relay. OFF delay is the time that the relay is activated after the last detection. Both ON and OFF delays can be easily set by placing the jumper head on the corresponding pins as following.

	A	B	C	D	E	F
ON	0s	10s	30s	1min	5mins	10mins
OFF	10s	1min	5mins	10mins	20mins	30mins



Technical Data

Product Code	Infrared Sensor	Power Supply	Detection Range	Output Relay	Consumption	Mounting Height m
149-DCV-PIR	Dual Element	24 ± 2 V AC/DC	15 x 15m at 15°C	24 V DC, 0.2 A max.	5mA @24 V AC	1.8 - 3.6
Product Code	Mounting Bracket	Detectable Speed m/s	RFI Immunity	Ambient Temperature °C	Ambient Humidity RH max.	Dimensions mm
149-DCV-PIR	MB-99	0.1 - 3.0	Av. 20V/m (10 - 1000MHz)	-20- 50	95%	112 x 66 x 45

PRESENCE DETECTOR

Accessories

Operation

Standby

After the warm up time expires, the sensor enters into standby mode. The detector will check whether both delays are properly set. If not, the green LED will blink to indicate.

Relay ON Delay


Relay ON delay is the time given to sensor to verify true occupancy before activating the relay output. Any further detection during ON delay will NOT reset the timer.

1 Minute Waiting

When Relay ON delay expires, the sensor enters into a 1 minute waiting time. If no detection occurs within 1 minute, the sensor will return to standby mode. If any detection occurs, then relay output will be activated and Relay OFF delay will be started.

Relay OFF Delay

Relay OFF delay is the time of relay activating. Every detection during this period will reset the timer.

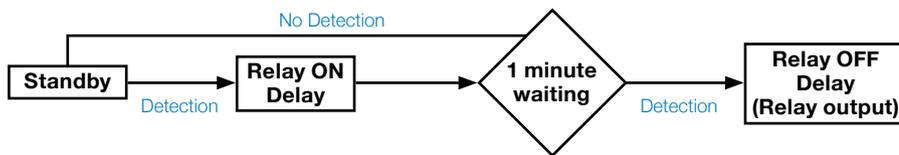

Installation

Do not install where the detector is exposed to direct sunlight or directly above strong sources of heat. Make sure the detection area does not have any obstruction (plants, large pieces of furniture, curtains etc.) which may block the detection.


Installation

1. Mount the base of mounting bracket on the selected position. Lead the cable through the access tunnel of mounting bracket or through the knockout openings (see description-picture page 1).
2. Open the front cover by loosening the locking screw at the bottom. Lead the cable into the unit and assemble the mounting bracket with the unit.
3. Connect the cable to the corresponding terminals according to the instructions below.
4. Replace the front cover and then proceed with the walk test.





Walk Test

Apply power supply and allow 25 seconds for sensor to warm up. The green LED will blink during warm up period. Walk across the detection zones (invisible) at normal speed. The red LED will blink whenever the sensor detects the motion.

Wiring Diagram

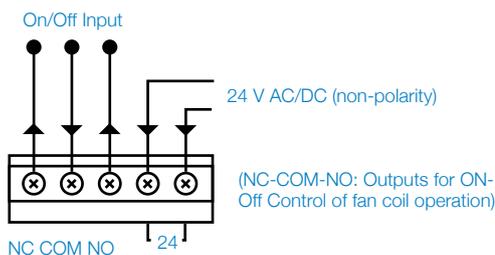

This product conforms with the requirements of European EMC standards CENELEC EN 61000-6-1 and EN 61000-6-3 and carries the CE mark. N.B. System neutral and signal neutral should be separately wired, because of current peaks in the supply wires. Screw terminal: Max. 1.5mm².

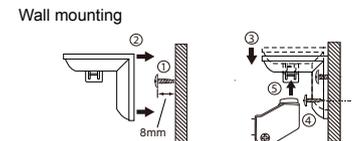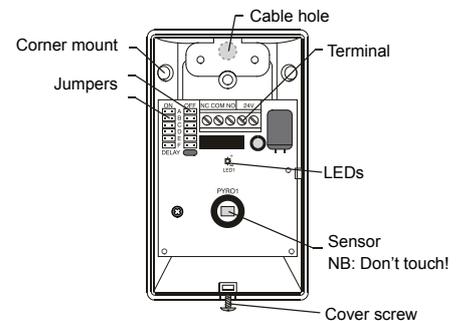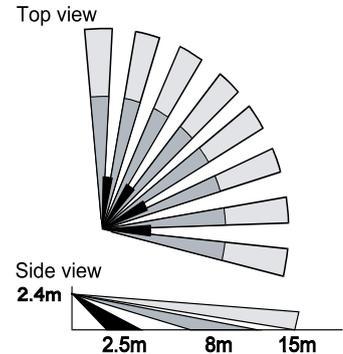

PRESSURE TRANSMITTER

Accessories



- Three settable working ranges for each model 100/300/500Pa
- Output signal 0 - 10V
- High level of accuracy and stability
- Models with square root output signal
- Quick and easy mounting

Overview

DPT is a transmitter for use with our Demand Control Ventilation system for measuring differential pressure in air and neutral gases for controlling pressure in HVAC systems.

Function

The transmitter consists of a plastic sensor-housing and a membrane of silicon LSR. The differential pressure affects the membrane which is connected to the sensor element. The element is manufactured with state-of-the art technology with a ceramic beam onto which thick-film resistors have been applied. The pressure on the membrane causes a movement which is transferred to the ceramic beam. Flexing of the beam gives changes in resistance. The changes in resistance are transmitted by means of built-in electronics to an analogue output signal. The measuring element gives a rapid response and a high level of accuracy. The properties of the ceramic element ensure that the transmitter has excellent long-term stability.

Sensor Housing

The sensor housing is made of transparent plastic. The cable input is on the left hand side with cable gland. The cover is closed by a single screw and can easily be detached from the hinges when mounting.

Setting the Working Range

The transmitter has three different working ranges depending on the model. The working ranges are set via two dip switches in the lower left corner of the circuit board according to the table shown below. The supply voltage must be disconnected. You can also change the zero point of the pressure measurement by pressing the button above the dip switches.



P		
0...500Pa	0	0
0...300Pa	0	1
0...100Pa	1	0

Mounting

The sensor should be mounted vertically using screws in the mounting holes on the back edge. There are also two mounting holes on the upper side of the sensor housing.

Connection Set

A connection set consisting of tubing and pressure outlets can be supplied as accessory to DPT.

PRESSURE TRANSMITTER

Accessories


Product Code	Supply Voltage	Power Consumption	Output Signal V	Load Impedance	Maximum Differential Pressure Pa	Pressure Connection	Cable Connection	Cable	Mounting	Material Sensor	
										Housing	Membrane
149-DCV-DPT	24 VAC + 15/-10 or 18 - 33V DC	10mA (0 -10V)	0 - 10	> 10kohm (0 - 10V)	Up to 500	Connection pipes for 6mm tube	Screw terminals. Cable gland with built-in strain relief	Three wire. Flexible cable is recommended	Vertical with pressure connections downwards	Transparent plastic	LSR (Silicon)
Product Code	Form of Protection	Accuracy		Temperature Dependence °C	Ambient Temperature °C	Storage Temperature °C	Dynamic Response Time ms	Resolution	ANS	DTV-ANSLUTNING	
		Linearity	Hysteresis								
149-DCV-DPT	IP54	< +/- 1.0 % fs* for working ranges within 0...100 Pa, for higher working ranges +/- 0.7 % fs*	< +/-1.0% fs	< 0.04% fs	0 - 70	-10 - 70	< 20	Working ranges up to (and including) 100 Pa: < 0.2 % fs*, other working areas: < 0.1 % fs*	Mounting kit with 2m plastic tube & 2 pressure outlets	Pressure connection of metal, angled 90°	

Installation Arrangement

1. Recommended installation arrangement: vertical, with pressure connections facing downward, drain of possible condensed water (factory calibration).
2. Horizontal, cover facing downward. Signal approximately 14 Pa higher than actual pressure.
3. Horizontal, cover facing upward. Signal approximately 14 Pa below actual pressure.

Mount the transmitter with minimum 10mm distance to magnetic material. If this is not possible there is a failure of up to minus 1 Pa for transmitters mounted on sheet steel.


Dimensions

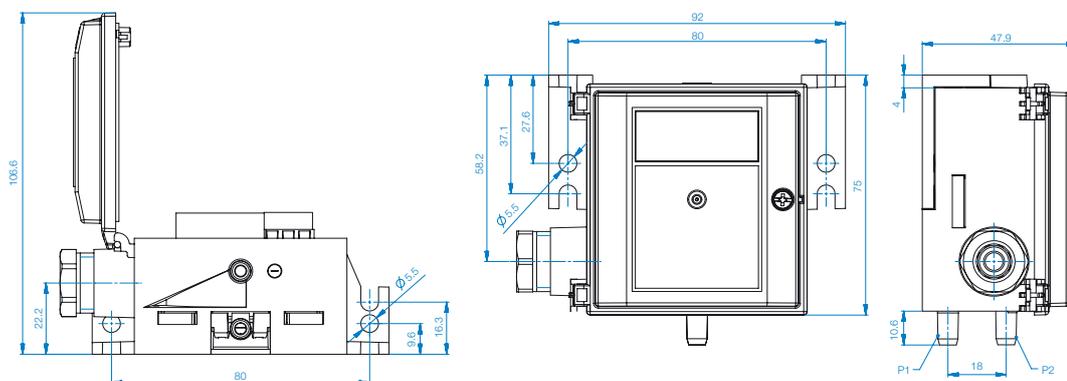

Wiring Diagrams

DTL 0 - 10V

- Supply Voltage 24V AC / 18 - 33V DC
- Output signal 0 - 10V DC
- System neutral



Dimensions are in mm.

* fs = fullscale, the complete sensor range

This product conforms with the requirements of European EMC standards CENELEC EN50081-1 and EN50082-1 and carry the CE-mark.

ROOM HUMIDISTAT

Accessories

- 1 Step
- High reliability and accuracy
- Protection class IP30
- Setpoint settings can be locked
- Changeover contact 250V AC, 5A



Overview

149-DCV-H1 is an electro-mechanical room humidistat for controlling humidification and/or dehumidification in HVAC systems.

Function

The humidistat uses a synthetic element as sensor medium. The synthetic element stretches as the humidity increases and shrinks as the humidity decreases. These changes are transmitted to a microswitch. The setpoint knob affects the position of the microswitch in relation to the synthetic element. The setpoint can be set at between 35...95% RH.

Synthetic Element

We have developed a new synthetic element that gives a high accuracy at a low cost. In order to eliminate the risk of tampering, the setpoint knob can be locked. In order to eliminate the risk of tampering, the setpoint knob can be locked by means of a locking screw under the cover.

Typical applications


Can be used to control a humidifier or a dehumidifier or for on/off controlling of a fan. Can also be used to alarm when the humidity exceeds or falls below a pre-set level.

Technical Data

Product Code	Material Casing	Ambient Temperature °C	Mounting	Protection Class	Outputs Changeover Contact	Setpoint %	Hysteresis %
149-DCV-H1	Polycarbonate	0 - 40°C	Wall	IP30	250V AC, 5A	35 - 95 RH	+/- 4 RH

ROOM HUMIDISTAT

Accessories

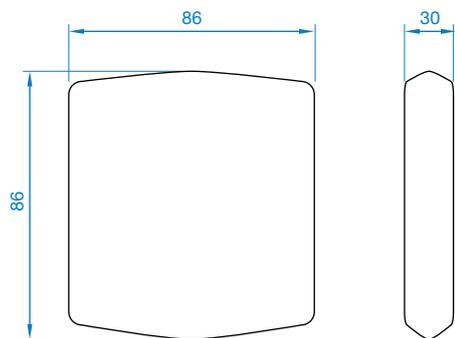

Wiring

Humidification Closing contact between terminals 1 and 2

Dehumidification Closing contact between terminals 1 and 3

Dimensions are in mm.

This Product confirms with the requirements of European LVD standards EN 60730-1:2000+A11+A12, EN 60730-2-13:1998+A1 and carries the CE-mark

Etta Fans Limited has a policy of continuous product development and improvement and therefore reserves the right to supply products which may differ from those illustrated and described in this publication. Confirmation of dimensions and data will be supplied on request.

TEMPERATURE TRANSMITTER

Accessories

- Output Signal 0 - 10 V DC
- Temperature 0...50°C
- Good Long Term Stability



Overview

Room transmitters for measuring temperature in indoor environments. Transmitters intended for wall mounting in HVAC systems. The sensor is mounted in the cover-part of the casing. The cover is easy to detach from the back by means of snap-in grips and detachable terminals. This makes mounting easier. Furthermore, no cables have to be disconnected, simplifying service and replacement.

Supply Voltage

The transmitter uses a supply voltage of 24 V AC $\pm 10\%$ or 15...35 V DC. It automatically detects and adapts to the supply voltage connected.

Temperature Sensor

The unit has a built-in temperature sensor, working range 0...50°C.


TEMPERATURE TRANSMITTER

Accessories


Product Code	Output Signal V	Supply Voltage U_v	Power Consumption W	Transformer Power VA	Electrical Connection mm ²	Ambient Temperature	Ambient Humidity	Storage Temperature	Protection Class
149-DCV-TRT	Analogue	24 V AC $\pm 10\%$ or 15...35 V DC	< 1 W	2	Screw terminals max 1.5 (AWG 16)	0...50°C	10...90 % RH non-condensing	-25 - +60°C	IP30

Analogue Output	Working Range	Accuracy at 20°C
0...10 V, $I_L < 1$ mA	0...50°C	$\pm 0.4^\circ\text{C}$

Dimensions

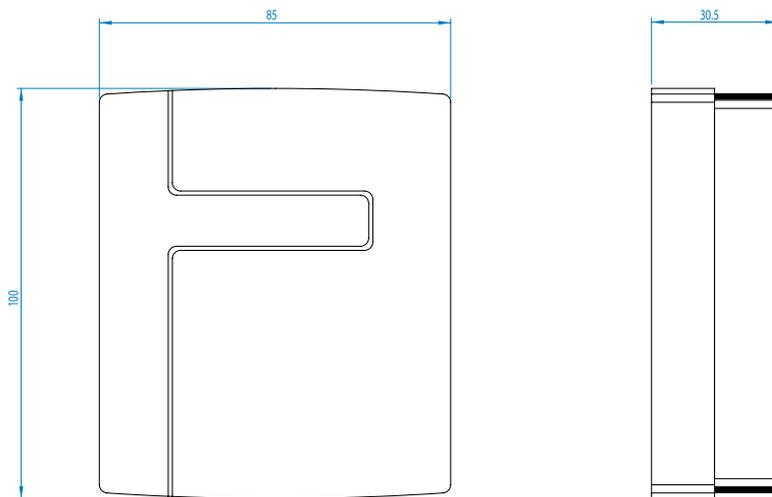

Wiring Diagram



GND and G0 are internally connected.

This product conforms with the requirements of European EMC standards CENELEC EN 61000-6-1 and EN 61000-6-3 and carries the CE mark.

Elta Fans Limited has a policy of continuous product development and improvement and therefore reserves the right to supply products which may differ from those illustrated and described in this publication. Confirmation of dimensions and data will be supplied on request.

Building Services

Tel **+44 (0) 1384 275800**
Fax **+44 (0) 1384 275810**
Email **info@eltafans.co.uk**

46 Third Avenue, Pensnett Trading Estate, Kingswinford,
West Midlands, DY6 7US United Kingdom

Applied Technology & Building Services Export

Tel **+44 (0) 1489 566500**
Fax **+44 (0) 1489 566555**
Email **at@eltafans.co.uk / export@eltafans.co.uk**

17 Barnes Wallis Road, Segensworth East Industrial Estate,
Fareham, Hampshire, PO15 5ST United Kingdom

eltafans.com

SQSDCV-03-2018 Issue A



BS EN ISO 9001:2015 FM 556465

