

AW 200E2 sileo Axial fan

Axial wall fan


Item Number: 34114

Variant: 230V 1~ 50Hz

- speed controllable by voltage reduction
- inlet protection guard
- safe and maintenance free operation
- can be installed in any mounting position
- electric connection via terminal box mounted on the motor
- single phase fans are supplied with capacitor

Axial fans of the AW sileo range do have a bionic shape of the fan blade, and are driven by external rotor motors. The AW range is equipped with a square wall plate, galvanized steel and powder coated in black (RAL9005). The protection guard at the inlet side is powder coated in black. The axial impeller is manufactured from black high efficiency composite material. The impeller is balanced dynamically in two levels in accordance with DIN ISO 1940 part 1, quality G6.3.

The motors are equipped with thermal contacts for motor protection, with leads to be connected to a motor protection unit, for example Systemair unit S-ET.




Technical parameters

Nominal data	
Voltage (Nominal)	230 V
Frequency	50 Hz
Phase(s)	1~
Input power	80 W
Input current	0.38 A
Impeller speed	2,550 r.p.m.
Air flow	max 0.2422 m ³ /s
Capacitance of capacitor	1.5 µF
Temperature of transported air	max 60 °C
Max temperature of transported air, when speed controlled	60 °C
Sound data	
Sound pressure level at 1m	59 dB(A)
Protection/Classification	
Enclosure class, motor	IP44
Insulation class	F
Dimensions and weights	
Weight	3.1 kg
Others	
Color name, casing	Black
Motor type	AC

Performance


Performance curve

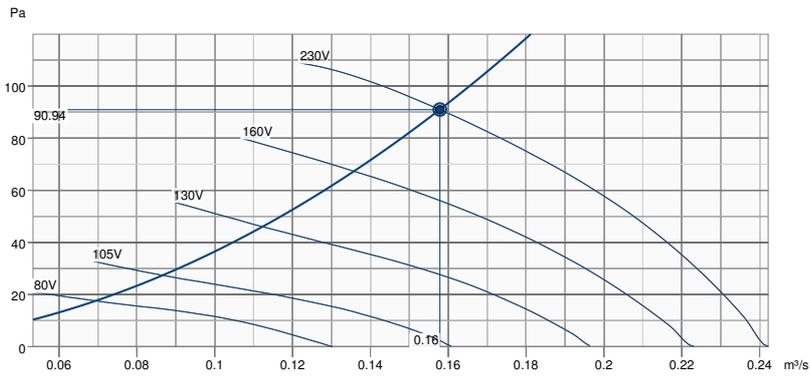

Hydraulic data


Required air flow	0.16 m³/s
Required static pressure	91 Pa
Working air flow	0.16 m³/s
Working static pressure	91 Pa
Air density	1.204 kg/m³
Power	75.2 W
Fan control - RPM	2549 rpm
Current	0.37 A
SFP	0.476 kW/m³/s
Control voltage	230.0 V
Supply voltage	230 V

Dimension

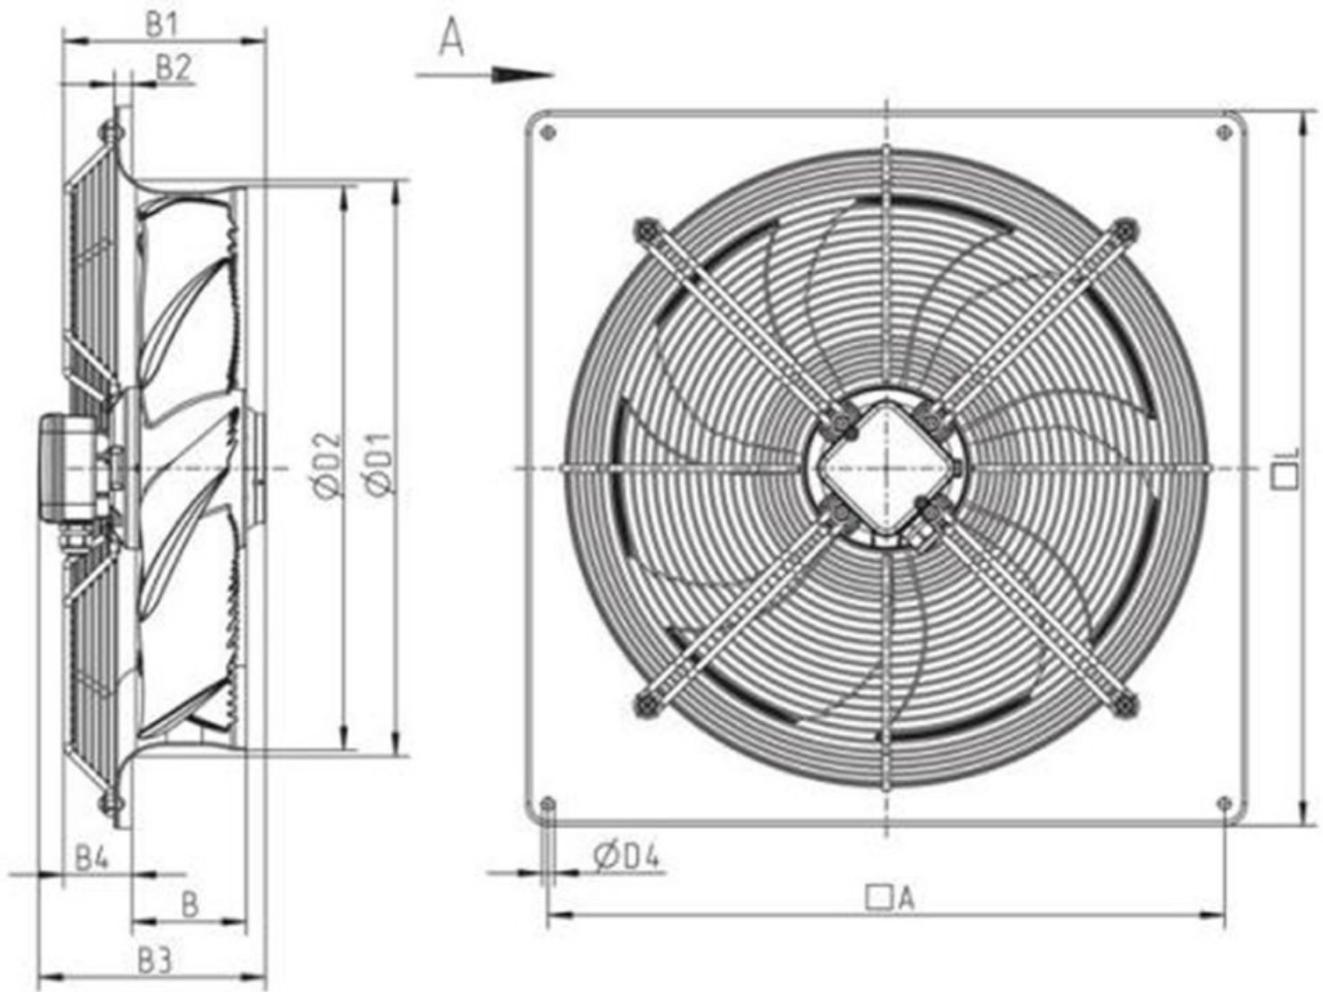

	□A	B	B1	B2	B3	B4	ØD1	ØD2	ØD4	□L
AW 200E2	260	46	92	6	142	30	210	200	7	312
AW 200E4	260	46	92	6	142	30	210	200	7	312

Wiring

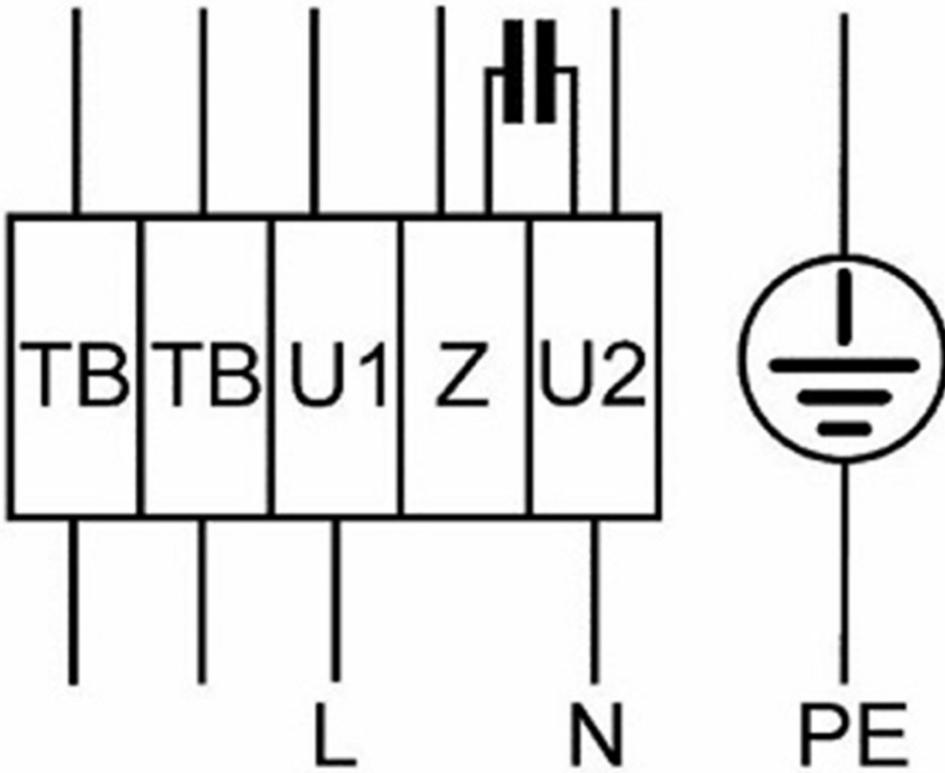

Accessories

- AWE-SK Motorprotection 2A/230V (5138)
- REU 1.5 Speed control (5004)
- RTRE 1,5 Speed control (5008)
- RAW 200/250 Roof Cowl c/w BG (85991)
- REE 1 Speed control (5314)
- REV-5POL/05 ON/OFF (33979)
- VK-20 Louvre shutter (5639)

Documents

- L-BAL-001-SYSTEMAIR.PDF
- EU_DECLARATION_OF_CONFORMITY_AXIAL_FANS_EN_004.PDF