


Hose Adapter (QF)

| Ø mm | O/D mm | I/D mm | Rolled Edge (nom. mm.) | Length (nom. mm) | Weight kg | Galvanised Steel |
|---------|-----------|-----------|---------------------------|---------------------|--------------|---------------------|
| 80 | 79 | 78 | 6 | 58 | 0.10 | 0.7 |
| 100 | 98 | 97 | 6 | | | |
| 125 | 124 | 123 | 6 | | | |
| 140 | 139 | 138 | 6 | | | |
| 150 | 148 | 147 | 6 | | | |
| 160 | 159 | 158 | 6 | | | |
| 180 | 179 | 178 | 8 | | | |
| 200 | 200 | 199 | 8 | | | |
| 224 | 224 | 223 | 8 | | | |
| 250 | 250 | 249 | 8 | | | |
| 300 | 298 | 297 | 10 | | | |
| 315 | 313 | 312 | 10 | | | |
| 350 | 348 | 347 | 10 | | | |
| 400 | 400 | 398 | 10 | | | |
| 450 | 449 | 447 | 10 | | | |
| 500 | 499 | 497 | 10 | | | |
| 560 | 559 | 557 | 10 | | | |
| 630 | 629 | 627 | 10 | | | |
| 710 | 709 | 707 | 10 | | | |
| | | | | | | 0.9 |

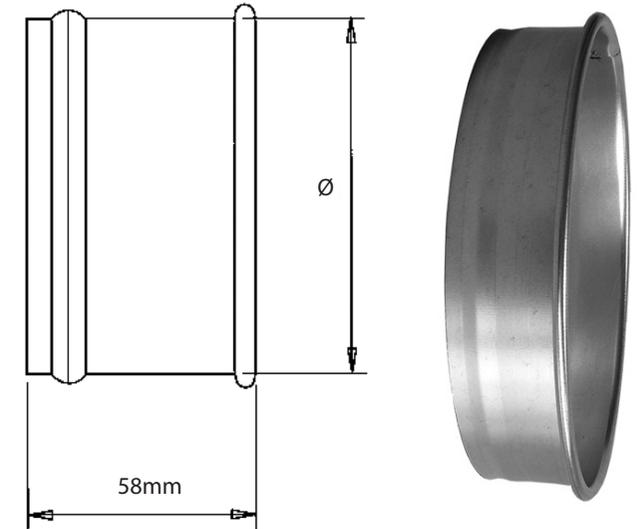

Construction
Longitudinal seam type: Spot welded.

Ends
QF (Quick-Fit rolled edge)

| Temperature Rating of Product Components | | |
|--|------------------|------------------------------|
| ° C | Hose Adapter | Sealants |
| 200° | Galvanised Steel | |
| 121° | | Joka Seal Metal Sealant 2315 |
| -20° | | |

Additional Notes

At temperatures ranging between 200° C and 250° C, the zinc-iron alloy layers in galvanised steel will continue to provide a high level of protection from corrosion. However, there may be some peeling, changes in mechanical properties, and reduction in the corrosion protection. Recommended max. service temperature is 200° C.

| Compliance / Rating of Product Components | | |
|---|---------------|--------------------------|
| Product | Material | Compliance / Rating |
| Hose Adapter | Galvanised | DX51D with Z275 Coating |
| Joka Seal Metal Sealant 2315 | Acetone blend | AAMA Specification 801.1 |