




WASHDOWN FAN WFD

ELTA

Three Phase Washdown Fan

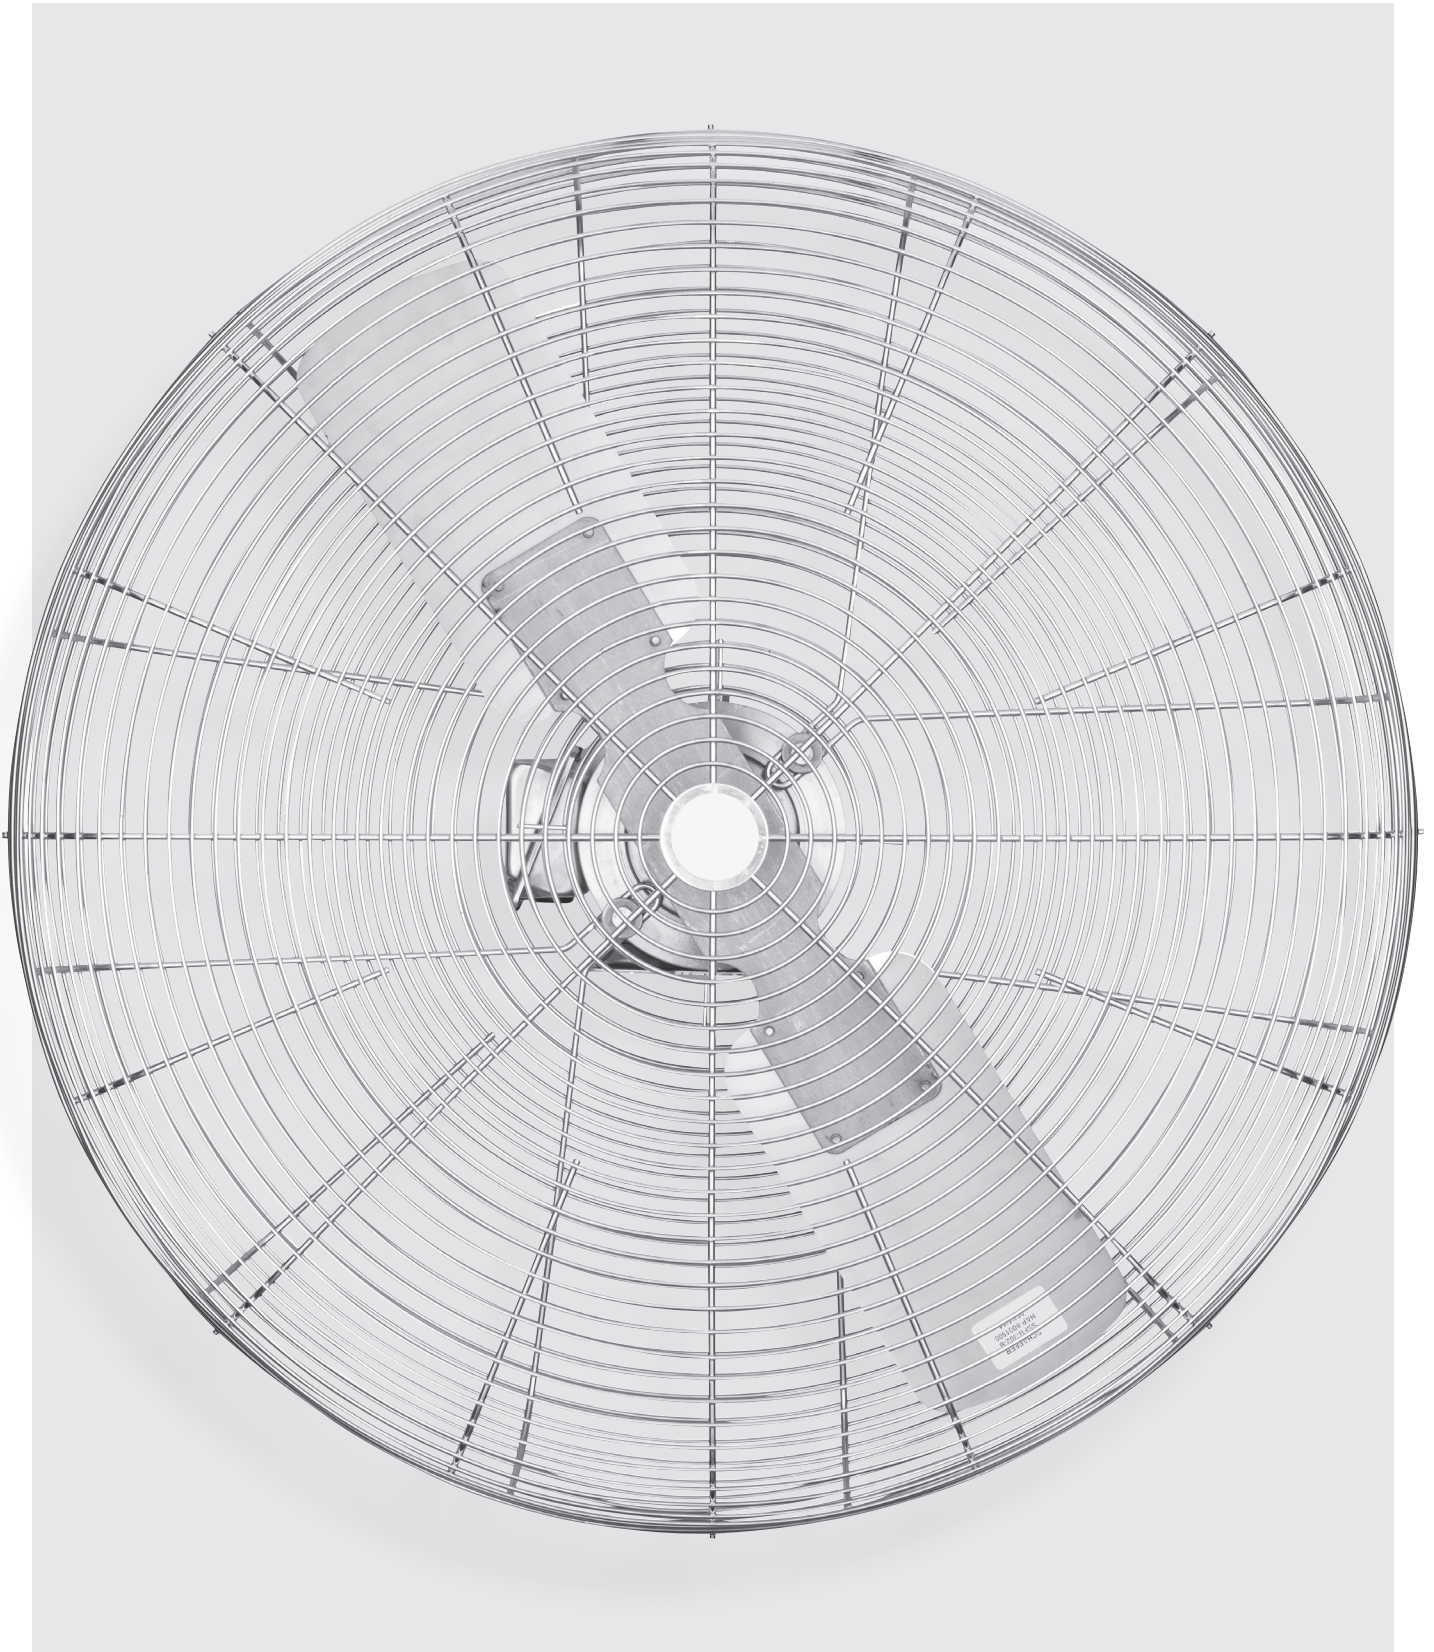

WASHDOWN FAN WFD

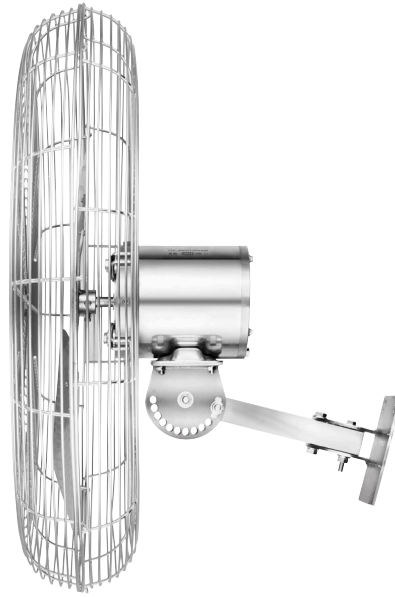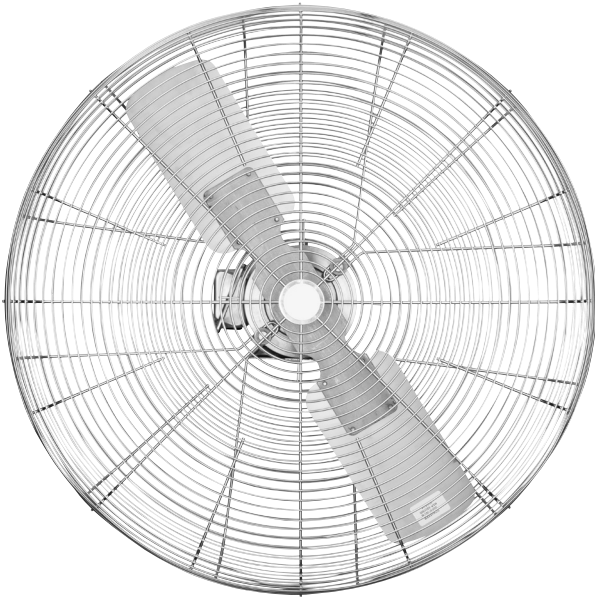

Description

The Three Phase Washdown Fan is the perfect solution for effectively and efficiently moving air in work areas where strict hygiene requirements exist. Designed for frequent washing, cleaning is made simple with users able to simply pressure wash the fan without any damage to the unit. The motor is rated IP55 and the unit is made of electropolished 304 stainless steel. Made in America to ensure durability, longevity and maintained performance during the life of the fan. It is backed with a 2 year warranty as standard.

Typical Applications

Specialised for food and beverage processing factories, kitchens, hospitals and other clean, corrosive or humid environments. Also suitable for retail spaces, shopping centres, health clubs, sport centres, schools, religious facilities, restaurants, theatres, stadiums, airports, distribution and manufacturing facilities, dairy/livestock barns and factories.

Features

- Fan can be pressure washed for simple and easy cleaning.
- Long life span with a 100% stainless steel construction.
- Stainless steel mounting bracket included.
- Blades and motors carefully matched to maximise performance and efficiency.
- Manufactured in America to ensure high quality construction and performance.
- Motor rated IP55.
- Comes with a 2 year warranty as standard.

Construction

Exterior casing, impellers, motor casing and mounting bracket constructed from 304 electropolished stainless steel. The unit can be completely pressure washed without damage to the impeller or motor.

Motor

Type – Three Phase Induction, Stainless Steel.

Electricity Supply – Three Phase 380V, 50HZ.

Speed – 1440 RPM.

Maximum Ambient Temp - 40° C.

Insulation Type – Class F.


IP Rating – IP55.

Testing

Airflow to ANSI/AMCA 230-99

Contact your local office for more information.

How To Order

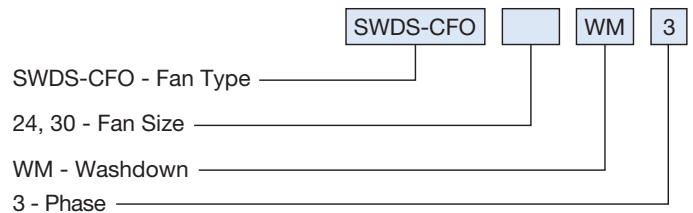

Suggested Specification

The Three Phase Washdown fans shall be supplied by Elta. Exterior casing, impellers and motor shell constructed from 304 electropolished stainless steel, including the brackets. Motor shall be rated IP55 with Class F insulation. The unit shall be tested to ANSI/AMCA 230-99 for airflow and can be completely pressure washed without damage to the impeller or motor.



Elta Asia Sdn Bhd

Tel **+603 7846 0340**

Email **info@elta.asia**

elta.asia

TP-WDF-2026 Issue A



FS 676456

A MEMBER OF  ELTA GROUP