


# AGRI-MAX HAF XL

Chimney Tube Fan

---

**ELTA**

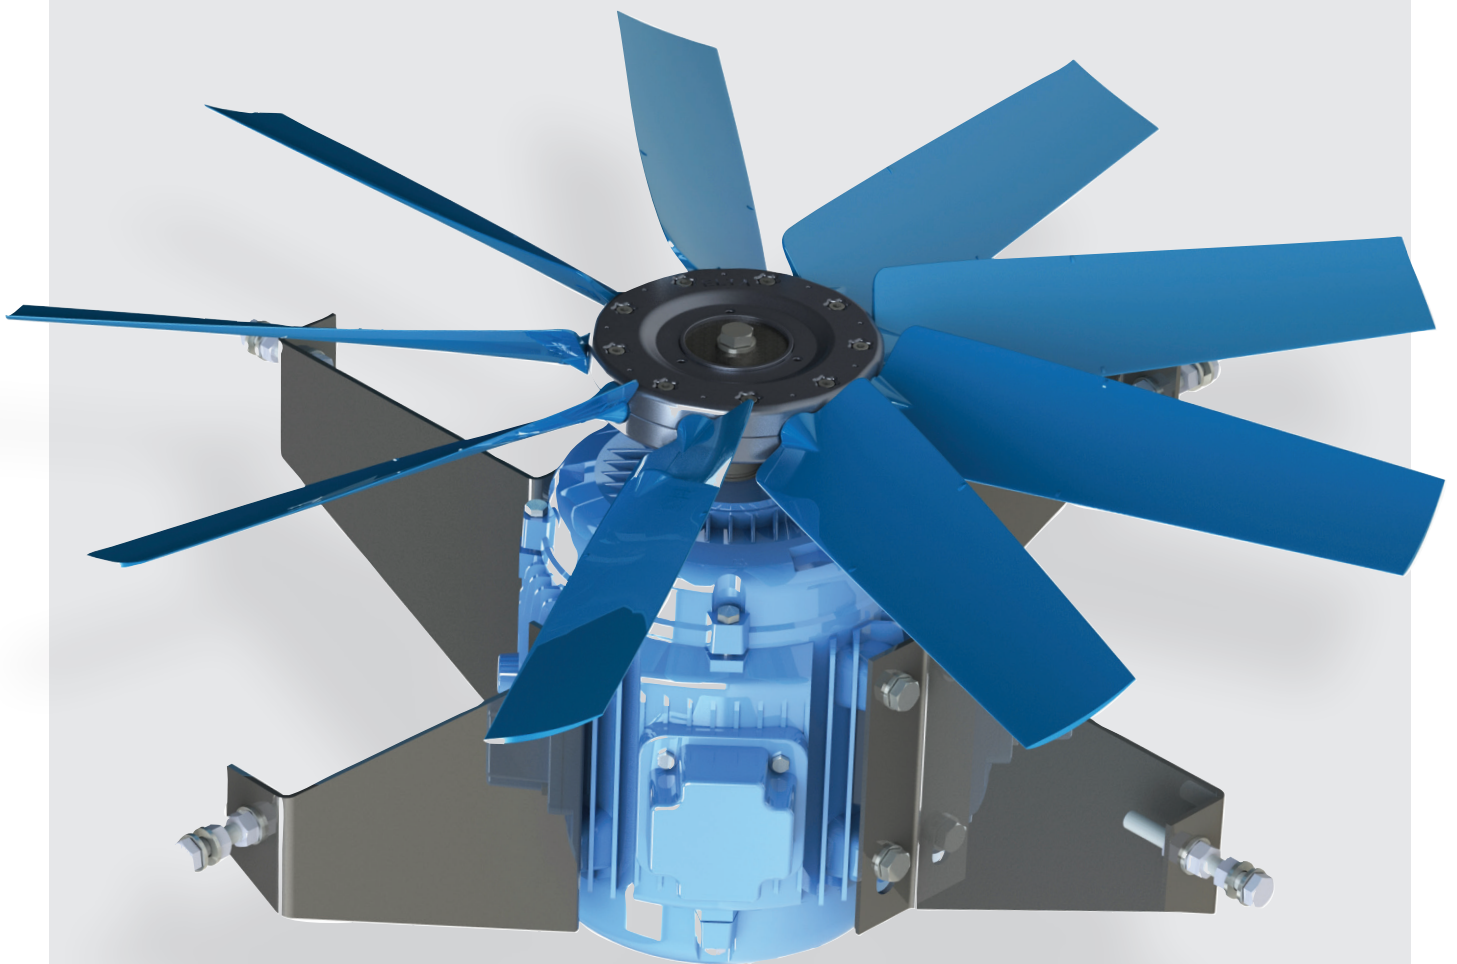

# AGRI-MAX HAF XL


## Product Overview

**Designed, built and distributed in the UK, the Agri-Max HAF XL follows industry-standard chimney sizing to be a direct replacement for your existing fan unit. Based on the proven WEG motors and our high efficiency impeller, the components have been proven on farm since 2013 with extensive support and next day cost-effective spares availability should the worst happen.**

The Agri-Max HAF XL has been designed based on not only 55 years experience of agricultural ventilation but also, the needs and wants from real customers on farm, seeing how they use our fans everyday.

The result is an honest, hardworking chimney fan constructed from quality components with agriculture in mind from the beginning. We assemble, balance and pack by hand at our UK manufacturing facility to ISO 9000 and ISO 9001 which ensures at every stage, that your fan is built and tested to the highest standards.

- Available in 800 & 900mm models
- Fits standard ventilation chimneys from any manufacturer
- Complete unit and spares available next day from stock for minimum downtime and cost
- 3 year warranty
- Designed and built for agriculture in Britain. Deployed extensively on farm for real-world usage testing

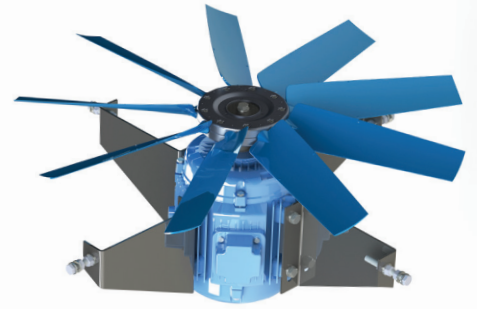

# AGRI-MAX HAF XL

## Performance, SFP & Electrical Data

Three Phase 380V to 415V / 50Hz

Model Number	Speed (r/min)	Airflow SFP	Airflow m³/s @ Static Pressure (Pa)						At Best Efficiency Point			Peak Amps	dBA @ 3m	
			0	25	50	75	100	150	Overall Eff%	Input (kW)	FMEG		Inlet	Outlet
HAF80063A	912	m³/s	6.349	5.981	5.554	5.064	4.431	-	36.4	1.221	46	2.78	Inlet	62
		W/(L/s)	0.20	0.21	0.23	0.25	0.28	-					Outlet	61
HAF90063A	894	m³/s	9.758	9.422	9.061	8.672	8.247	7.237	41.4	2.829	47	7.30	Inlet	69
		W/(L/s)	0.28	0.29	0.31	0.33	0.35	0.40					Outlet	69


Peak Amps @ 400V / 3PH / 50Hz.  
Data provided is at standard air density of 1.2 kg/m³.  
Overall static efficiency, r/min and FMEG values are per ISO 12759. Installation Category A.  
All performance and EP relevant information comprises measurements which are determined using standardised measurements, measured in a full bell mouth.  
The overall A-weighted sound pressure level is at a distance of 3m with spherical free-field propagation. It is expressed in dB re-20µPa and is presented for comparative purposes only.

# AGRI-MAX HAF XL

## Dimensional Data

Model Number	ØA	B	C	ØD	E	F
HAF80063A	797	40	20	701	161	150
HAF90063A	897	52	30	790	218	203

Dimensions in mm.

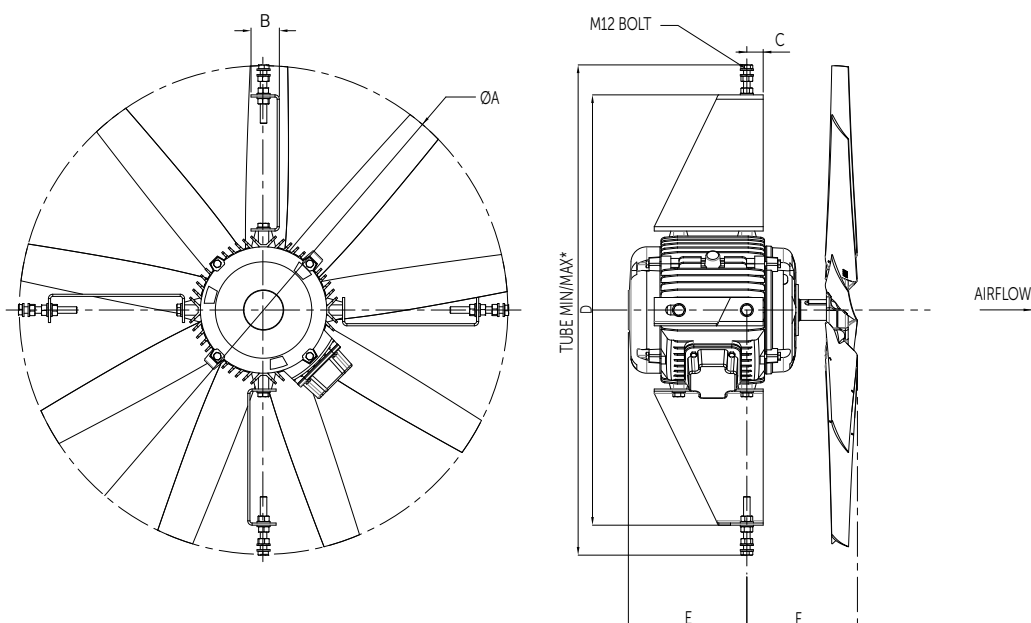

## Accessories

- 800mm unit will fit any 785-865mm tube or chimney.
- 900mm unit will fit any 884-956mm tube or chimney.
- You may need to use the included mounting hardware if the fan is not compatible with your existing mountings.

Tel **+44 (0)1725 511422**  
Email **agriculture@eltauk.com**  
**eltauk.com/agriculture**

ISSUE 1. SEP 2025.